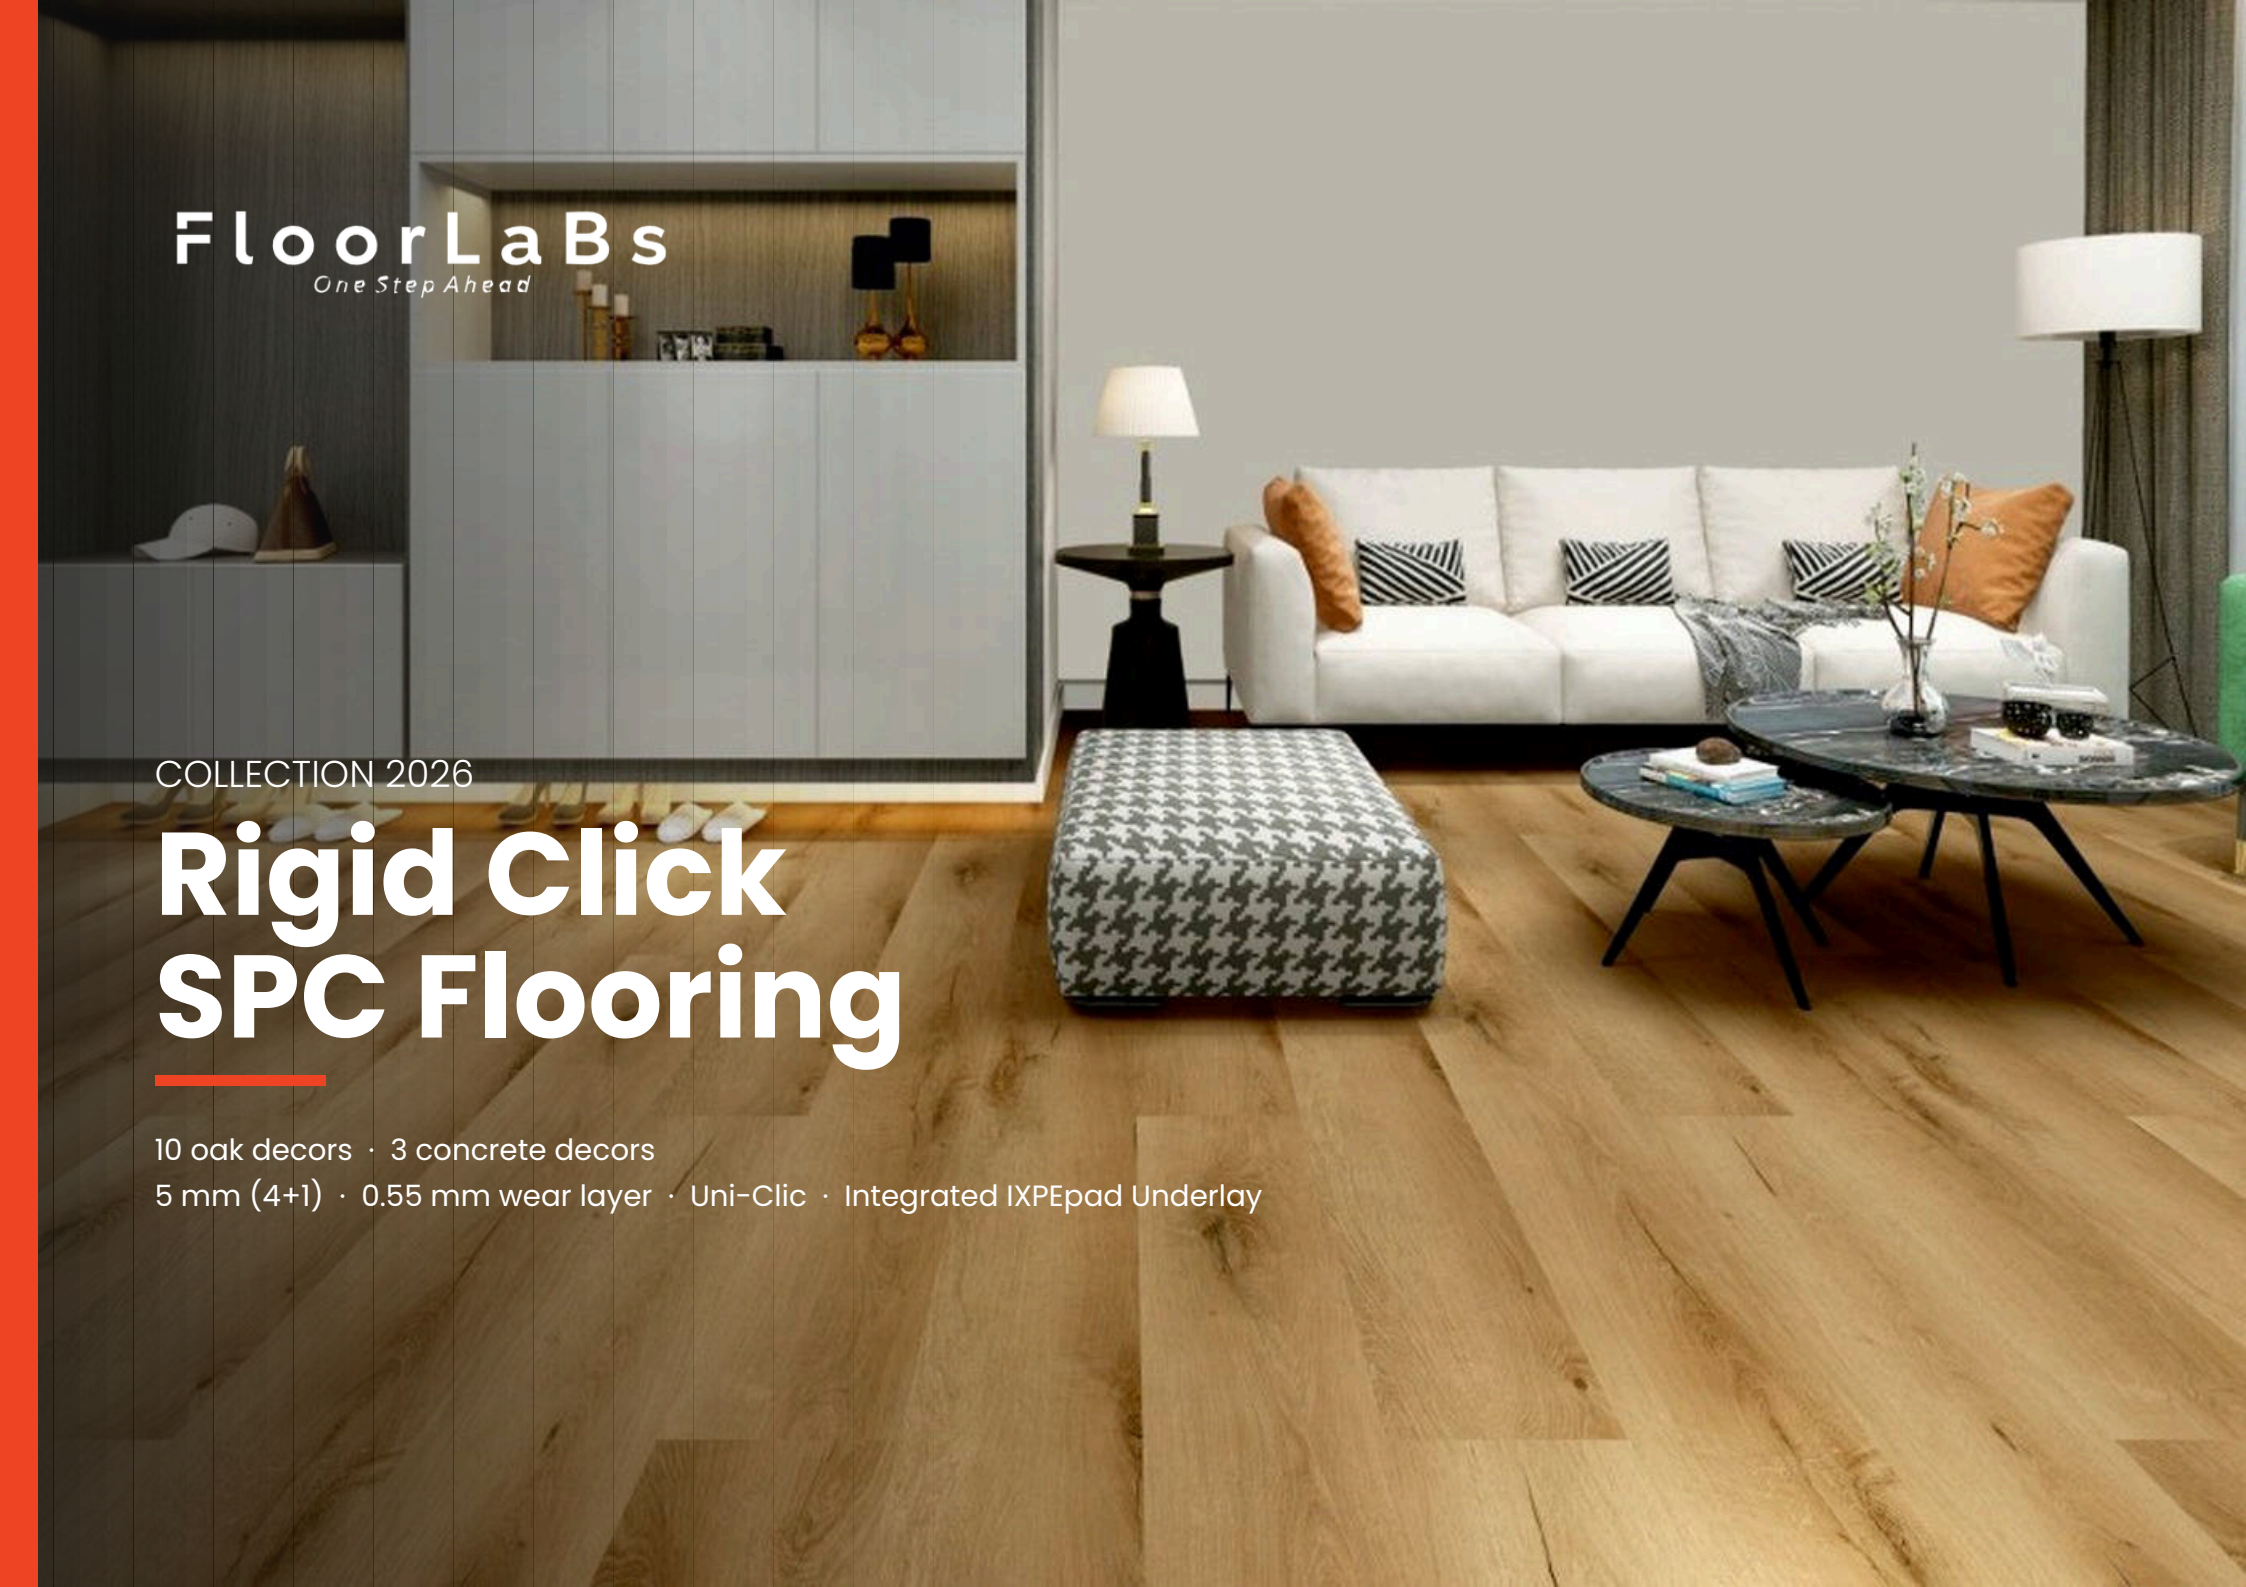


FloorLaBs
One Step Ahead

COLLECTION 2026

Rigid Click SPC Flooring

10 oak decors · 3 concrete decors
5 mm (4+1) · 0.55 mm wear layer · Uni-Clic · Integrated IXPEpad Underlay

One collection. Thirteen decors.

Rigid Click SPC · technical overview

FloorLaBs
One Step Ahead

Our SPC range offers a combination of competitive quality, contemporary designs and reliable technical performance. Our products are supported by EPD and M1 certifications.

5 mm

TOTAL THICKNESS

4 mm SPC core + 1 mm Underlay (4+1)

0.55 mm

WEAR LAYER

Rigid 0.55 top layer for durable everyday use

Uni-Clic

LOCKING SYSTEM

Fast floating installation, no glue required

IXPEpad

UNDERLAY

Integrated IXPEpad Underlay on every decor

DECOR OVERVIEW



Oak Columbus
F30129-22



Oak Denver
F40209-3



Oak Ural
F30129-22B



Oak London
F40274-8



Oak Rome
F40226-29



Oak Kansas City
F40147-2



Oak Newark
F40274-1



Oak Brooklyn
F3751-2



Oak San Jose
F40209-5



Oak Seattle
F40226-0



Dark Concrete
F34181-0



Light Concrete
F34165-7



Anthracite Concrete
F34165-3

Technical Data

EN 16511 · SPC rigid vinyl plank · 4 mm + 1 mm IXPE · 0.55 mm surface film

FloorLaBs
One Step Ahead

PRODUCT SPECIFICATION

Plank size	1219.2 x 228.6 x 5 mm
Construction	4 mm SPC + 1 mm IXPE, 0.55 mm film
Underlay	Integrated IXPEpad Underlay
Package	8 boards · 2.233 m² · 18.55 kg
Pallet	48 packages · 107.18 m² · 929 kg
Density	2000 g/cm³
Bevel	Micro bevel on four sides
Surface	Digital Ultra HD, realistic wood
Locking system	Unilin Uniclic
UV resistance	Yes
Carbon print	EPD verified · GWP A1-A3: 10.5 per m²

Data shown for 228.6 x 1219.2 mm planks.

PERFORMANCE


TEST	STANDARD	RESULT
Category of use	EN 16511	Class 23 / 33
Wear resistance	EN 16511	≥ 3000 cycles
Wheelchair effect	ISO 4918	25000 cycles, no change
Scratch resistance	EN 16084	MSR-A1
Stain resistance	EN 438-2	Class 5 (no change)
Slip class	EN 16165 / DIN 51130	R10
Dimensional stability	EN 16511	≤ 0.15%
Underfloor heating		Max. 27 °C
Formaldehyde emissions	CDPH	E1 (EN 14041)
TVOC emissions	TVOC	0.5 mg/m³ or less
Fire resistance	EN 13501-1	Bfl-s1
Thermal conductivity	EN 12667	0.034 (m²K)/W
Electrostatic behavior	EN 1815	Antistatic floor covering
Footstep sound (1 mm IXPE)	EN ISO 717-2	19 dB
Warranty	EN 16511 KL 33	25 yrs home · 10 yrs light commercial

CERTIFICATIONS

EPD verified and Emission Class M1 certified.
Intertek Clean Air Gold certified.
Class 23 / 33 for intensive use in public spaces.

Oak Collection


Wood-look decors · 228.6 x 1219.2 mm planks

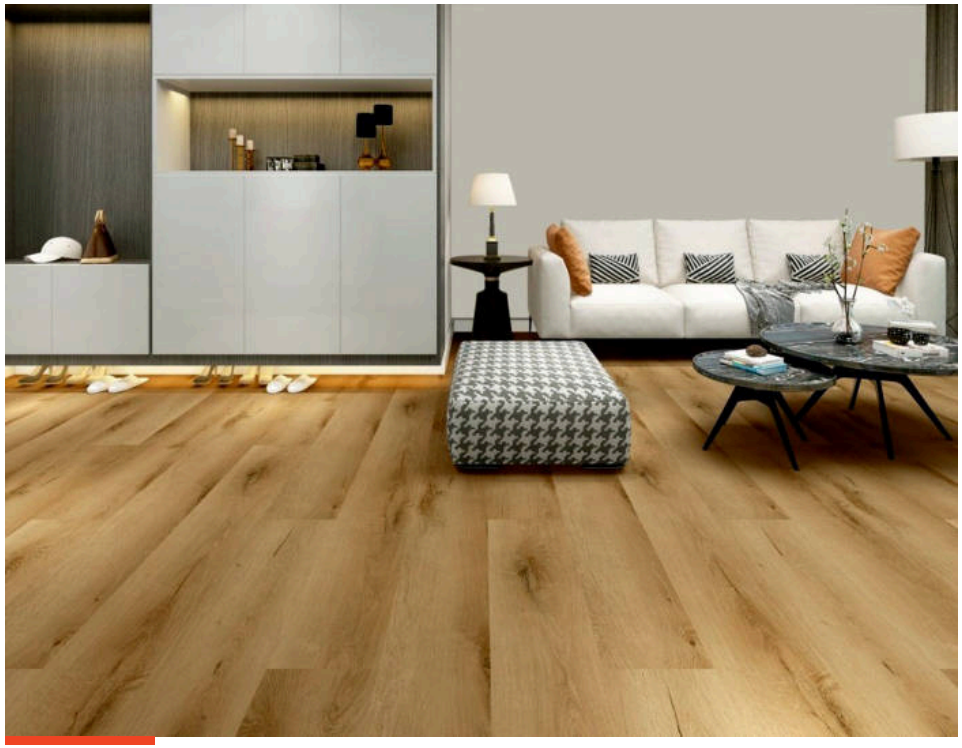

Oak Columbus

FloorLaBs Rigid Click SPC

Code	F30129-22
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

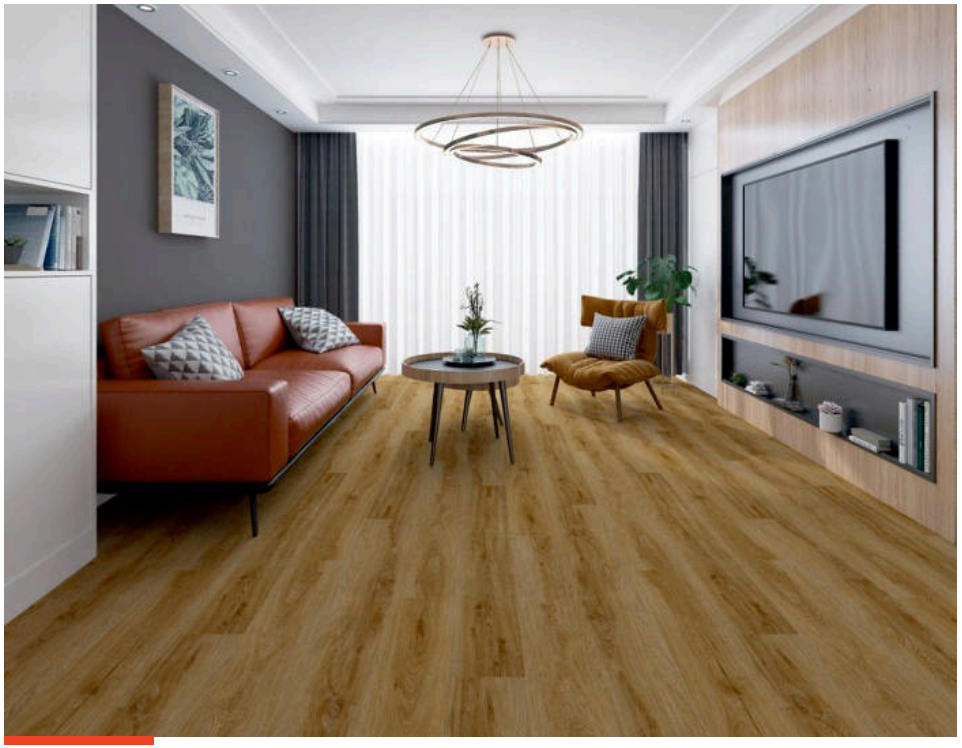


Oak Denver

FloorLaBs Rigid Click SPC

Code	F40209-3
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

Oak Collection


Wood-look decors · 228.6 x 1219.2 mm planks

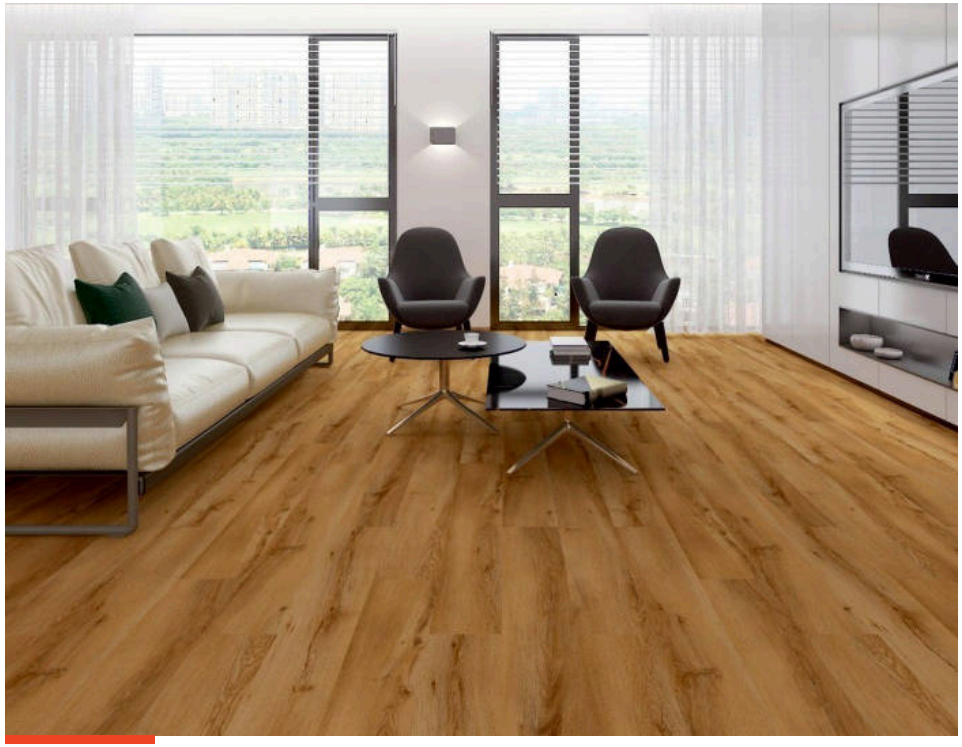

Oak Ural

FloorLaBs Rigid Click SPC

Code	F30129-22B
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

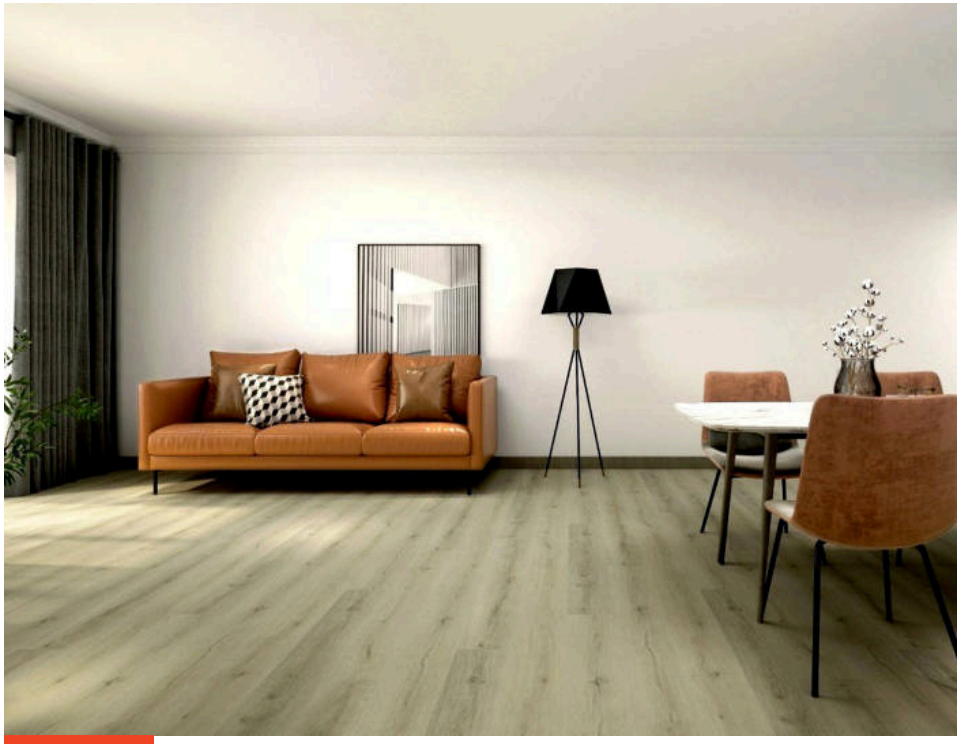

Oak London


FloorLaBs Rigid Click SPC

Code	F40274-8
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

Oak Collection

Wood-look decors · 228.6 x 1219.2 mm planks


FloorLaBs
One Step Ahead

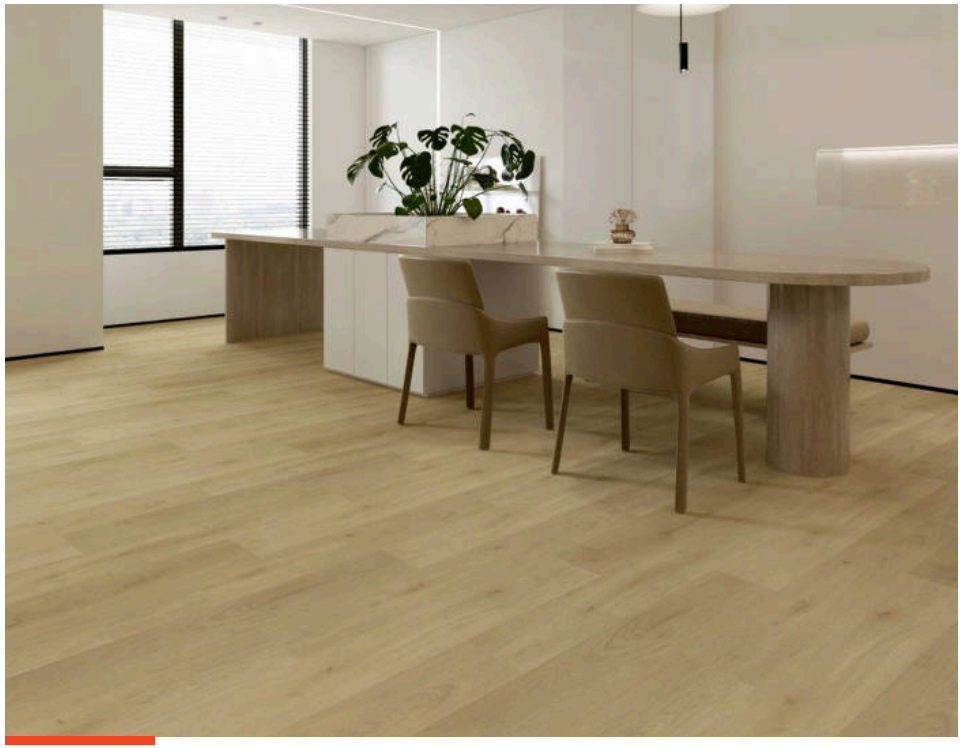

Oak Rome

FloorLaBs Rigid Click SPC

Code	F40226-29
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

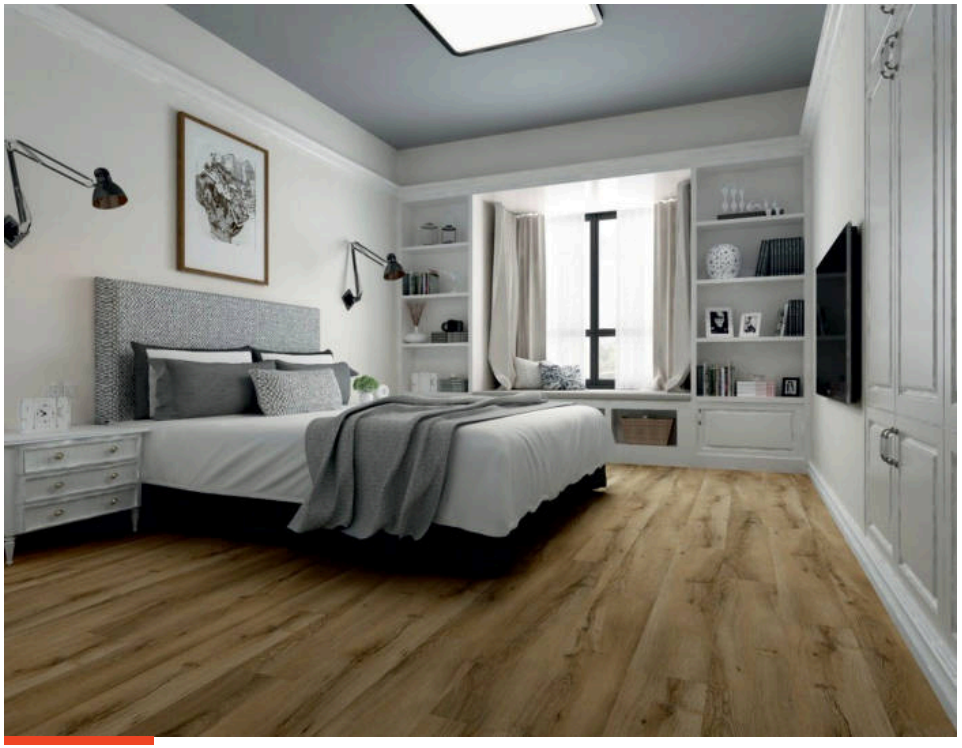


Oak Kansas City

FloorLaBs Rigid Click SPC

Code	F40147-2
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

Oak Collection

Wood-look decors · 228.6 x 1219.2 mm planks

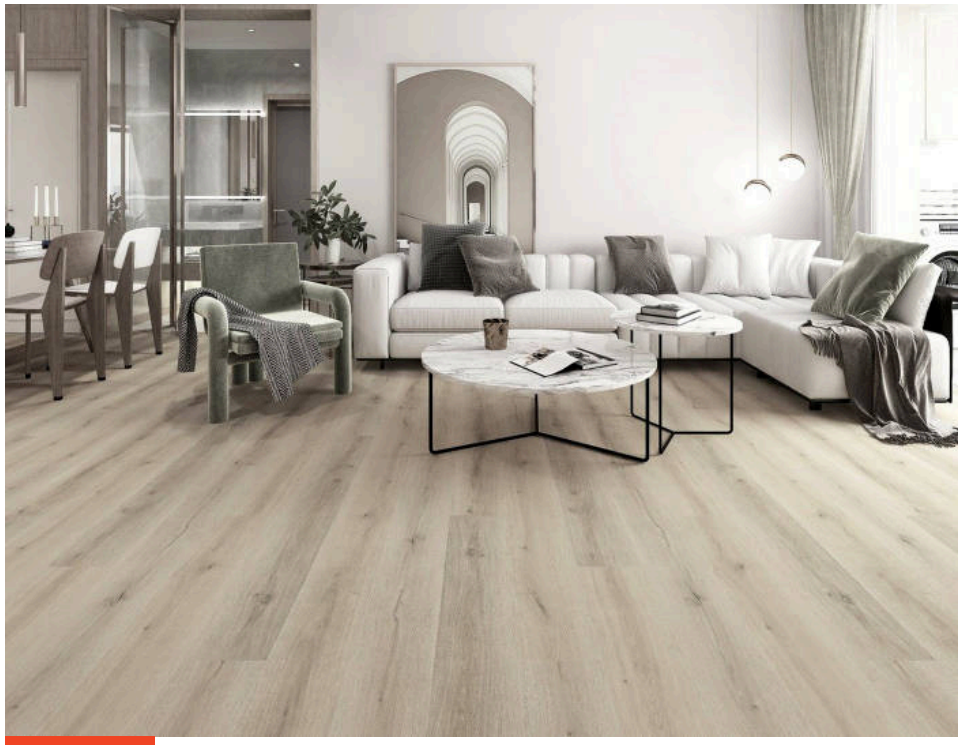

Oak Newark

FloorLaBs Rigid Click SPC

Code	F40274-1
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic




Oak Brooklyn

FloorLaBs Rigid Click SPC

Code	F3751-2
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

Oak Collection

Wood-look decors · 228.6 x 1219.2 mm planks

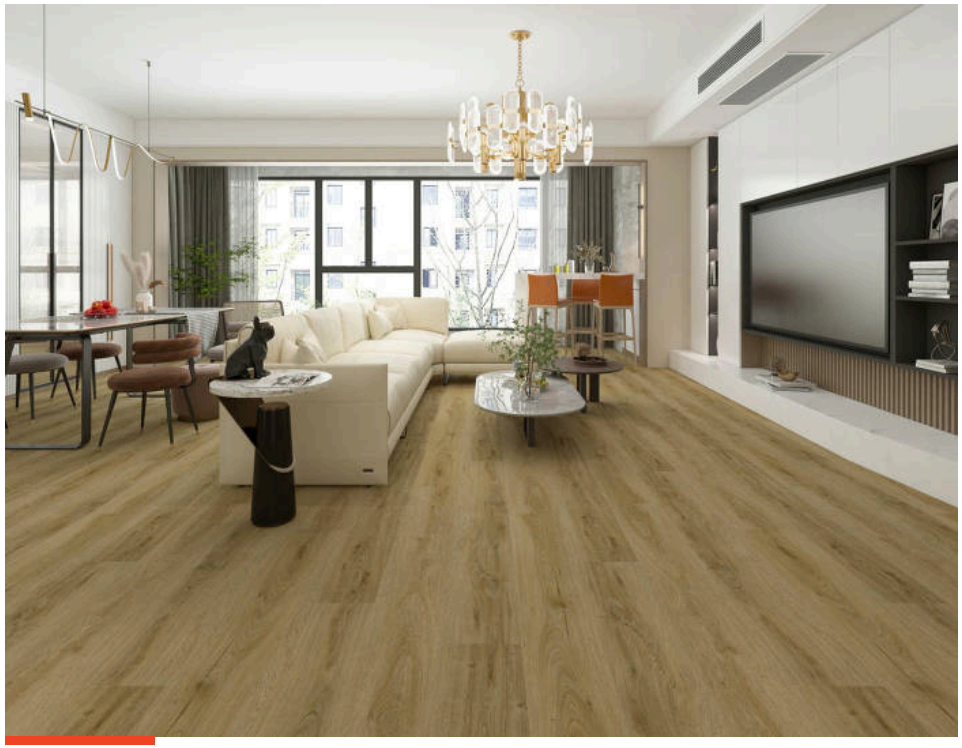

Oak San Jose

FloorLaBs Rigid Click SPC

Code	F40209-5
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic




Oak Seattle

FloorLaBs Rigid Click SPC

Code	F40226-0
Size	228.6 x 1219.2 mm (9" x 48")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

Concrete Collection


Stone-look decors · 304.8 x 914.4 mm tiles

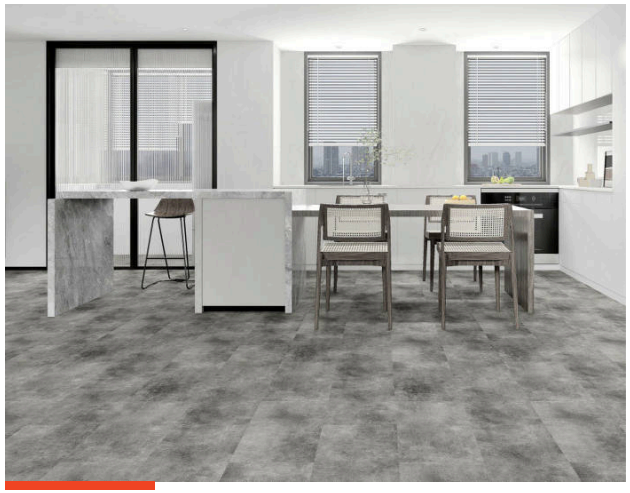

Dark Concrete

FloorLaBs Rigid Click SPC


Code	F34181-0
Size	304.8 x 914.4 mm (12" x 36")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

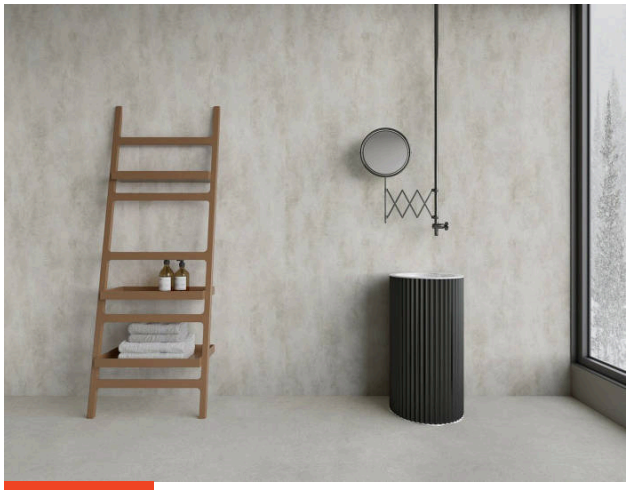

Light Concrete

FloorLaBs Rigid Click SPC

Code	F34165-7
Size	304.8 x 914.4 mm (12" x 36")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

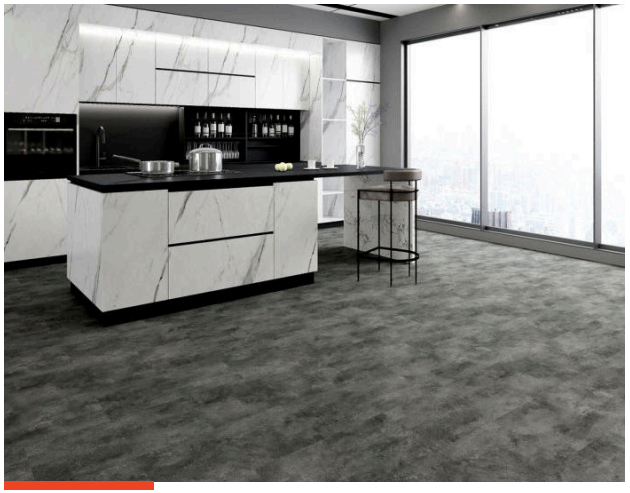

Anthracite Concrete

FloorLaBs Rigid Click SPC

Code	F34165-3
Size	304.8 x 914.4 mm (12" x 36")
Thickness	5 mm (4+1)
Wear layer	0.55 mm
Click	Uni-Clic

FloorLaBs

One Step Ahead

Samples, pricing and container offers on request.