

FloorLaBs

One Step Ahead

SEALANTS & ADHESIVES

Product Catalogue 2026

CLEANING PRODUCTS · SEALANTS · POLYURETHANE FOAMS · GLUES & ADHESIVES · ANCHORS · SPRAYS

THE FULL CHEMICALS RANGE

85 products for installers, builders, workshops and DIY: sealants, foams, adhesives, anchors and technical sprays, all under the FloorLaBs name.

85	6	41
Products	Product groups	Spray paint colours



CLEANING PRODUCTS

Cleaners 2 products 04

SEALANTS

Silicones 11 products 05

Acrylics 5 products 11

Hybrids 6 products 14

Polyurethanes 4 products 17

POLYURETHANE FOAMS

Filling & Bonding 14 products 19

GLUES & ADHESIVES

Quick Set 2 products 26

Assembly & Wood Glues 2 products 27

Epoxies 8 products 28

Super Glues & Fire Sealant 3 products 32

ANCHORS

Chemical Anchors 2 products 34

SPRAYS

Technical Sprays 25 products 35

Spray Paint 1 product 42



MADE IN CERTIFIED PLANTS

Our chemicals are produced on modern, automated lines under certified quality, environmental and safety management systems.





CERTIFICATIONS

ISO 9001/OHSAS 18001
ISO 14001 / ISO 27001

HOW TO READ THIS CATALOGUE

- Transparent
- Colour swatch with RAL code
- **Size** Content per unit
- **Per box** Units in one carton

Technical values are typical values measured under laboratory conditions (usually 23°C and 50% RH). Always test the product on the actual substrate before use.



CLEANING PRODUCTS

Cleaners

Powerful cleaners for kitchens, bathrooms and workshops.

CLEANERS

MIRACLE MULTI-PURPOSE CLEANING PASTE



PROPERTIES

Miracle Cleaning Paste is a super cleaning paste ideal for cleaning all domestic and non-domestic surfaces. Perfectly clean. Removes grease and dirt. Detergent components of natural origin. Easy to use, with excellent results.

APPLICATIONS

Thanks to its powerful formulation all stains and rust on pots, barbecues, ceramic tiles, glass, sinks, PVC, garden furniture, paints, boats, hobs will be gone in a minute.

HOW TO USE

Pour some paste on the stained and dirty surface and rub with the help of a clean cloth. After rubbing, rinse with water. Do not use on plastic, painted wood and aluminum parts. Do not use the product on hands, face and on surfaces that could come into direct contact with food. Do not use directly on hot surfaces. Do not exert excessive pressure on glass and ceramic hobs as the surface could be scratched.

No stains, no rings. Long lasting.

PACKAGING

SIZE	PER BOX
500 g	12 pcs

CLEANERS

MIRACLE FOAM CLEANER



PROPERTIES

With its superior-performance foamy formula, Miracle Foam Cleaner can easily clean and remove even the most stubborn and challenging oils on vertical surfaces just in seconds.

APPLICATIONS

It can be used for cleaning dirt and oils on the surface of cooking hobs, ovens, exhaust fans, cooker hoods, cooker hood filters, kitchen countertops, exhaust fans, kitchen cupboards and bathroom cabinets, marble, tile and ceramic surfaces, stainless steel and aluminium surfaces, sheet and other metal surfaces, oven trays, pans and cooking pots, PVC and plastic surfaces, bicycle, motorcycle and automobile rims, MDF tables, leather, vinyl and canvas shoes, all painted surfaces, glass surfaces, leather seats and upholstery, faucets and sinks.

HOW TO USE

General Usage Method: Spray Miracle Foam Cleaner on the dirty surface, wait for a while and then wipe it with a sponge or cloth. For surfaces with stubborn, challenging and excessive amounts of dirt repeat the foregoing step.

No stains, no rings. Long lasting.

PACKAGING

SIZE	PER BOX
500 g	12 pcs



SEALANTS

Silicones

Acetic and neutral silicones for joints, glazing, sanitary and high-temperature work.

SILICONES

MULTI PURPOSE UNIVERSAL SILICONE PLUS



PROPERTIES

Universal Silicone PLUS is a one-component acetic drying silicone sealant, suitable for sealing in general. It has a very strong adhesion and can be used on most common non porous building materials. Anti mold product.

- Remains permanently elastic even after hardening. Excellent adhesion on non porous surfaces. Resists aging and does not discolor.
- Resists a wide range of cleaning chemicals.
- Can be applied in all seasons.

APPLICATIONS

Ideal for general sealing applications.

- Sealing of doors and windows.
- Suitable for DIY. Bathrooms, kitchens and plumbing systems.
- Connections and expansion joints on glass, porcelain, steel, etc.
- Sealing of electrical and telephone devices, sockets and switches

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**0.91-0.97 g/ml (ASTM D 792)**
Shore A	**10-15 (after 28 days)**
Tack-free time	**8-20 min. (23°C and 50% RH)**
Cure rate	**Min.11-12 mm/ Day (23°C and 50% RH)**
Tensile strength	**2 N/mm² (ASTM D 412)**
Elongation at break	**≥350% (ASTM D 412)**
Sagging	**0 mm (ISO 7390)**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**280 ml**	**25 pcs**
Transparent	**50 ml**	**12 pcs**
RAL 9010	**280 ml**	**25 pcs**
RAL 9010	**50 ml**	**12 pcs**
RAL 9005	**280 ml**	**25 pcs**
RAL 1013	**280 ml**	**25 pcs**
RAL 7016	**280 ml**	**25 pcs**
RAL 9002	**280 ml**	**25 pcs**
RAL 7040	**280 ml**	**25 pcs**
RAL 8017	**280 ml**	**25 pcs**

SILICONES

MULTI PURPOSE UNIVERSAL SILICONE 280 G



PROPERTIES

Universal Silicone is a one-component acetic drying silicone sealant, suitable for sealing in general. It has a very strong adhesion and can be used on the most common non porous building materials. Anti mold product.

- Remains permanently elastic even after hardening. Excellent adhesion on non-porous surfaces. Resists aging and does not discolor.
- Resists a wide range of cleaning chemicals.
- Can be applied in all seasons.
- Sealing of electrical and telephone devices, sockets and switches.

APPLICATIONS

Ideal for general sealing applications.


- Sealing of doors and windows.
- Suitable for DIY. Bathrooms, kitchens and plumbing systems.
- Connections and expansion joints on glass, porcelain, steel, etc.

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**0.91-0.97 g/ml (ASTM D 792)**
Shore A	**10-15 (after 28 days)**
Tack-free time	**11-12 min. (23°C and 50% RH)**
Cure rate	**Min. 2 mm/ Day (23°C and 50% RH)**
Tensile strength	**1,1 N/mm² (ASTM D 412)**
Elongation at break	**≥350% (ASTM D 412)**
Sagging	**0 mm (ISO 7390)**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**280 g**	**25 pcs**

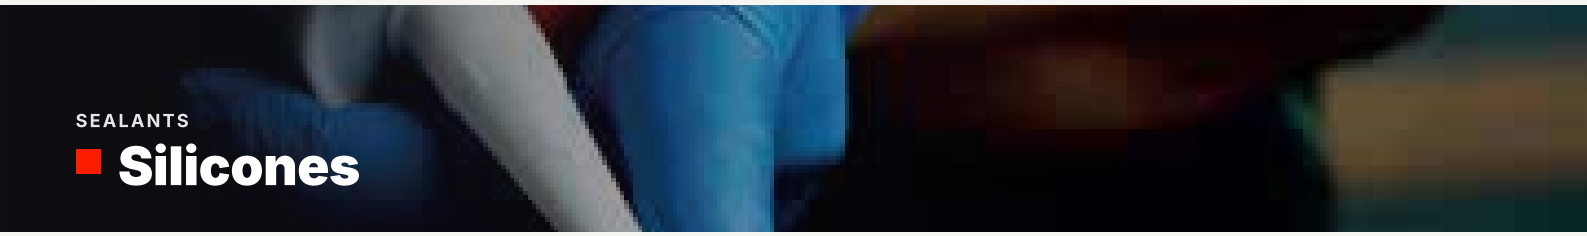

SEALANTS

Silicones

SILICONES

MULTI PURPOSE UNIVERSAL SILICONE 310 ML



PROPERTIES

Universal Silicone is a one-component acetic drying silicone sealant, suitable for sealing in general. It has a very strong adhesion and can be used on the most common non porous building materials. Anti mold product.

- Remains permanently elastic even after hardening. Excellent adhesion on non-porous surfaces. Resists aging and does not discolor.
- Resists a wide range of cleaning chemicals.
- Can be applied in all seasons.
- Sealing of electrical and telephone devices, sockets and switches.

APPLICATIONS

Ideal for general sealing applications.

- Sealing of doors and windows.
- Suitable for DIY. Bathrooms, kitchens and plumbing systems.
- Connections and expansion joints on glass, porcelain, steel, etc.

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**0.91-0.97 g/ml (ASTM D 792)**
Shore A	**10-15 (after 28 days)**
Tack-free time	**8-20 min. (23°C and 50% RH)**
Cure rate	**Min.11-12 mm/ Day (23°C and 50% RH)**
Tensile strength	**2 N/mm² (ASTM D 412)**
Elongation at break	**≥350% (ASTM D 412)**
Sagging	**0 mm (ISO 7390)**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**310 ml**	**25 pcs**

SILICONES

KITCHEN & BATHROOM SILICONE



PROPERTIES

Kitchen and Bathroom Silicone is a high performance acetic cure silicone sealant designed for filling and sealing spaces in a wide range of sanitary applications.

- Remains clean over time.
- Exceptional resistance to mold and mildew.
- Resists extreme temperatures and aging.
- Does not crack and does not lose color.
- Resists detergents, cleaners and chemicals in general.
- Acetic hardening system.

APPLICATIONS

Joints on sanitary fittings and seals in kitchens and bathrooms.


- Sealing of joints, windows and weatherproof systems

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**0.96 ± 0.03 g/ml (ASTM D 792)**
Shore A	**16-17 (after 28 days)**
Tensile strength	**1,5 N/mm² (ISO 8339)**
Tack-free time	**11-12min. (23°C and 50% RH)**
Cure rate	**Min. 3 mm/ Day (23°C and 50% RH)**
Elongation at break	**≥300% (ASTM D 412)**
Elastic recovery	**Approx. 100%**
Sagging	**0 mm**
Volume change	**< 40 % (ISO 10563)**
Temperature resistance	**-45°C to +150°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**280 ml**	**25 pcs**
White	**280 ml**	**25 pcs**
White	**50 ml**	**12 pcs**

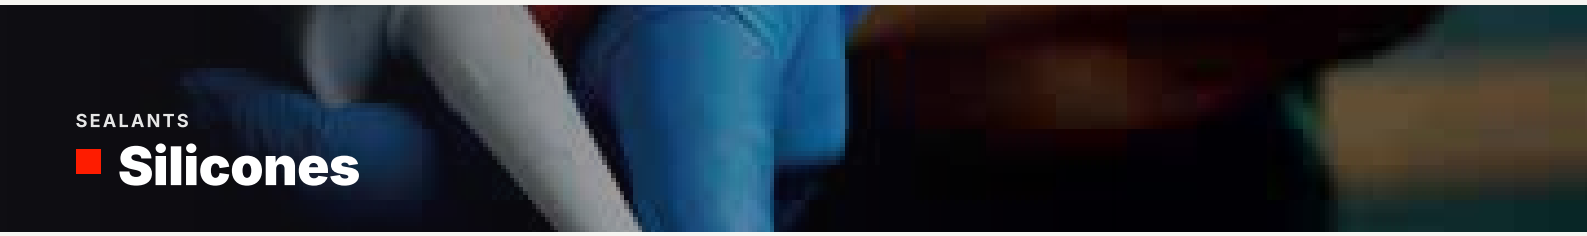

SEALANTS

Silicones

SILICONES

EXTERIOR NEUTRAL SILICONE



PROPERTIES

Neutral Silicone for Constructions and Sheet Metal is a neutral polymerization silicone product. Offers high performance and is formulated for filling and sealing applications in a wide range of building materials. Has exceptional adhesive power, odorless and non-corrosive. 100% silicone, solvent-free.

- One-component, moisture-hardening.
- Excellent adhesion on a wide range of porous and non-porous materials.
- Excellent resistance to atmospheric agents, direct sunshine, rain, snow and ozone.
- Fast polymerization.
- Low modulus, high elasticity.

APPLICATIONS

- Sealing in sheet metal work, for flashings, copper, steel and galvanized sheet metal gutters, connection joints (walls, concrete, PVC, wood, glass).
- Installation of windows, doors and glass.
- Sealing in kitchens and bathrooms or where almost total absence of odor is required.

TECHNICAL DATA

Base	**Silicone polymer (oxime)**
Polymerization system	**Neutral**
Density (transparent and aluminium)	**1.02 ± 0.03 g/ml (ASTM D 792)**
Density (other colours)	**1,33 ± 0.03 g/ml (ASTM D 792)**
Shore A (transparent and aluminium)	**15-20 (after 28 days)**
Shore A (other colours)	**25-30 (after 28 days)**
Tensile strength	**≥0,4 N/mm² (23°C and 50% RH) (ISO 8339)**
Elongation at break (transparent)	**>200%**
Elongation at break (other colours)	**>250%**
Elastic recovery	**Approx. 70% (ISO 7389)**
Sagging	**0 mm**
Temperature resistance	**-50°C to +150°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**310 ml**	**25 pcs**
RAL 9010	**310 ml**	**25 pcs**
RAL 9005	**310 ml**	**25 pcs**
RAL 8004	**310 ml**	**25 pcs**
RAL 9002	**310 ml**	**25 pcs**
RAL 8017	**310 ml**	**25 pcs**
RAL 7040	**310 ml**	**25 pcs**
RAL 1013	**310 ml**	**25 pcs**

SILICONES

RTV HIGH TEMPERATURE SILICONE



PROPERTIES

Silicone for High Temperatures is a high performance silicone sealant developed for sealing, bonding and repair where heat resistance is required. It is an ideal sealant for high temperature building applications. Excellent heat resistance after hardening, up to 250°C permanently, and up to 300°C temporarily. Acetic silicone.

- 100% silicone. Fast curing, high strength.
- Does not create cracks.
- Remains flexible at low and high temperatures.
- One-component.
- Low VOC content.

APPLICATIONS


- Automotive gaskets and bonding.
- In heating systems and sealing / sealing furnaces.
- Sealing and gluing in stoves.
- In heating devices.
- For all sealing and bonding that must withstand high temperatures.

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**1.02 ± 0.03 g/ml (ASTM D 792)**
Shore A	**12-13 (after 28 days)**
Tensile strength	**≥1,5N/mm² (23°C and 50% RH) (ASTM D412)**
Tack-free time	**7-13 min. (23°C and 50% RH)**
Cure rate	**Min. 3 mm/ Day (23°C and 50% RH)**
Elongation at break	**>500% (ASTM D412)**
Elastic recovery	**Approx. > 100 % (ISO 7389)**
Sagging	**0 mm (ISO 7390)**
Temperature resistance	**-50°C to +250°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 3024	**310 ml**	**12 pcs**
RAL 3024	**50 ml**	**12 pcs**
RAL 9005	**310 ml**	**12 pcs**

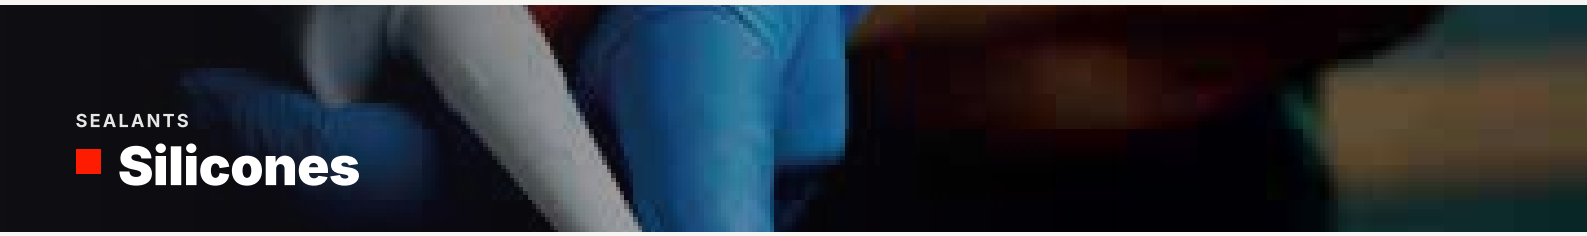

SEALANTS

Silicones

SILICONES

AQUARIUM SILICONE



PROPERTIES

Aquarium Silicone has been specifically formulated for the fabrication of fresh and salt-water aquariums. The bonds are unaffected by continuous immersion in water and, when fully cured, is non-toxic to fish.

- 100% silicone polymer.
- High strength.
- Solvent free .
- Resistant to ozone, ultra violet radiation and temperature extremes

APPLICATIONS

1. Contact area must be dry, clean, free from dust, oil and grease. 2. Ensure neat sealant edges mask the areas adjacent to joints with Masking tape. 3. Cut the tip of the cartridge with angle in accordance with size of the surface to be applied on. 4. Place the cartridge in the gun and inject the joint with the sealant 5. The applied sealant should be smoothed immediately with a wet spatula, tool or finger. Remove masking tape right

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**1.02 ± 0.03 g/ml (ASTM D 792)**
Shore A	**15±3 (after 28 days)**
Tensile strength	**≥ 1,5 N/mm² (23°C and 50% RH) (ISO 8339)**
Elongation at break	**>500%**
Elastic recovery	**Approx. 100 % (ISO 7389)**
Sagging	**0 mm**
Temperature resistance	**-50°C to +150°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**280 ml**	**25 pcs**
RAL 9010	**280 ml**	**25 pcs**

SILICONES

MIRROR SILICONE



PROPERTIES

High-performance neutral-based silicone, particularly suitable for damage-free bonding of mirrors of all types and sizes.

- One-component, moisture-hardening.
- Excellent adhesion.
- Not corrosive.
- Fast polymerization.
- Low modulus, high elasticity.
- 100% silicone, solvent free.
- Absence of odor.

APPLICATIONS

Mirrored walls in shops, restaurants, gyms.


- Bonding of mirrors on plaster, concrete, wood, mirrors on doors or ceramic coverings.

TECHNICAL DATA

Base	**Silicone polymer (oxime)**
Polymerization system	**Neutral**
Density	**1.02 ± 0.03 g/ml (ASTM D 792)**
Shore A	**15±20 (after 28 days)**
Tensile strength	**> 0,9 N /mm² (23°C and 50% RH) (ASTM D412)**
Tack-free time	**5-10 min. (23°C and 50% RH)**
Cure rate	**Min. 2.5 mm/ Day (23°C and 50% RH)**
Elongation at break	**> 250%**
Sagging	**0 mm**
Volume change	**6 mm**
Temperature resistance	**-50°C to +150°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**310 ml**	**12 pcs**

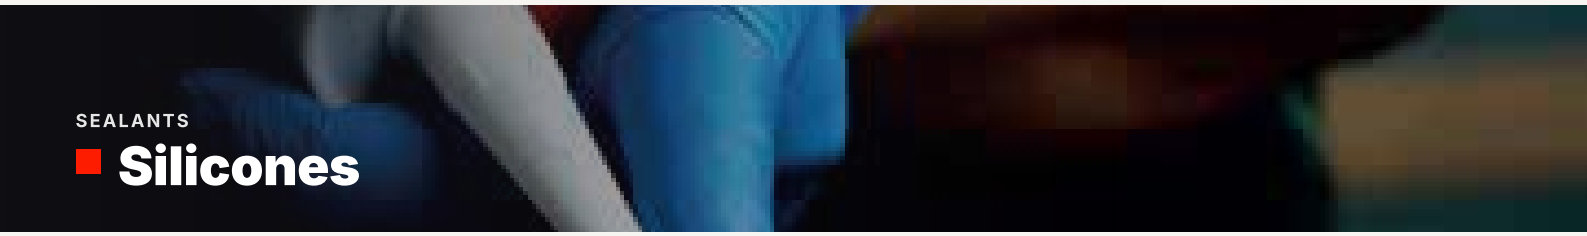

SEALANTS

Silicones

SILICONES

PROFESSIONAL 100% SILICONE



PROPERTIES

Pro is a one-component acetoxy based silicone sealant. It is used as a filling and bonding material for ceramic tile, window, aluminium, metal in bathroom and kitchen.

- 100 % silicone polymer.
- Excellent elasticity.
- Solvent free.
- Resistant to moisture Resistant to UV

APPLICATIONS

1. Contact area must be dry, clean, free from dust, oil and grease. 2. Ensure neat sealant edges mask the areas adjacent to joints with Masking tape. 3. Cut the tip of the cartridge with angle in accordance with size of the surface to be applied on. 4. Place the cartridge in the gun and inject the joint with the sealant 5. The applied sealant should be smoothed immediately with a wet spatula, tool or finger. Remove masking tape right after smoothing.

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**1,02 ± 0,03 g/ml (ASTM D 792)**
Shore A	**15±3 (after 28 days)**
Tack-free time	**8-20 min. (23°C and 50% RH)**
Cure rate	**Min. 2 mm/ Day (23°C and 50% RH)**
Tensile strength	**1.5 N/mm² (ASTM D 412)**
Elongation at break	**≥500% (ASTM D 412)**
Sagging	**0 mm (ISO 7390)**
Application temperature	**+5°C to +40°C**
Temperature resistance	**-40°C to +150°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**280 g**	**25 pcs**

SILICONES

FIRE STOP SILICONE



PROPERTIES

Fire Stop Silicone is one part neutral curing, gunnable, specially formulated silicone sealant for being barrier against fire. It creates a barrier against fire up to 4 hours.

- Easy application
- Long life reliability and low maintenance
- Superior adhesion to wide range of building materials including concrete and brickwork
- Flexibility with storage time and stock usage
- Can be applied in vertical and overhead joints
- Unaffected by high or low temperatures
- UV Resistant
- Low odor

APPLICATIONS


Fire Stop Silicone was specifically developed for fire resistant sealing of connection and expansion joints in construction, is fire resistant in case of fire. Fire Stop Silicone is a high performance neutral cure silicone sealant designed to give superior adhesion and durability in a wide range of glazing, weather sealing and trade applications. Fire Stop Silicone will bond to form a strong weatherproof seal on most common building materials such as: glass, ceramic, steel, aluminum, brick, concrete, most plastics, etc.

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Neutral**
Density	**1,41± 0.03 g/ml (ASTM D 792)**
Shore A	**10-15 (after 28 days)**
Tack-free time	**Approx. 8 min. (23°C and 50% RH)**
Cure rate	**Min. 2-5 mm/ Day (23°C and 50% RH)**
Tensile strength	**>1,2 N/mm² (ASTM D 412)**
Elongation at break	**>200% (ASTM D 412)**
Sagging	**0 mm (ISO 7390)**
Application temperature	**+5°C to +40°C**
Temperature resistance	**-50°C to +150°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**280 g**	**25 pcs**

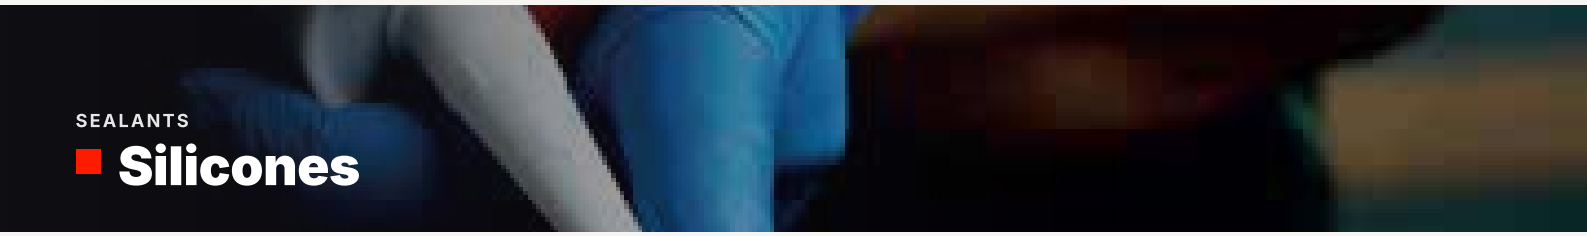

SEALANTS

Silicones

SILICONES

AUTO GASKET MAKER



PROPERTIES

RTV Auto Sealant is on oxime-based, fast curing, durable, flexible and low modules, neutral gasket sealant designed to give superior adhesion and durabllity in very high temperatures.

APPLICATIONS

It can be used as gasket sealant for automoblles, differential cover, motor cover, carburetor cover and pumps; for sealing in heating systems and thermostat. It is suitable for continuous operation in the temperature range between -50°C and up to +300°C.

TECHNICAL DATA

Base	**Silicone polymer**
Polymerization system	**Acetic**
Density	**1.02 ± 0.03 g/ml (ASTM D 792)**
Shore A	**12-13 (after 28 days)**
Tensile strength	**≥ 1,5N/mm² (23°C and 50% RH) (ASTM D412)**
Tack-free time	**7-13 min. (23°C and 50% RH)**
Cure rate	**Min. 3 mm/ Day (23°C and 50% RH)**
Elongation at break	**>500% (ASTM D412)**
Elastic recovery	**Approx. >100 % (ISO 7389)**
Sagging	**0 mm (ISO 7390)**
Temperature resistance	**-50°C to +250°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**280 g**	**25 pcs**



SEALANTS

Acrylics

Paintable acrylic sealants and fillers for interior and exterior joints.

ACRYLICS

ACRYLIC SEALANT



PROPERTIES

Acrylic Sealant is a one-component, universal, acrylic sealant, suitable for filling cracks and joints both indoors and outdoors. Ideal for static joints with an excellent ratio of plasticity and elasticity.

- Over paintable.
- Can be used on all porous surfaces (brick, concrete, wood, etc.)
- Very easy to apply and clean.
- Waterproof after hardening.
- Odorless.

APPLICATIONS

- Sealing of low and medium expansion joints on various types of building materials (wood, concrete, bricks, etc).
- Filling of cracks and crevices in walls and ceilings.
- Sealing of joints between windows, walls, doors, etc.

TECHNICAL DATA

Base	**Acrylic dispersion**
Consistency	**Soft paste**
pH	**7-9**
Specific gravity	**1,62 ± 0,03 g/cm³ (ASTM D 792)**
Tack-free time	**15 ± 60 min (23°C and 50% RH) (ASTM C 679)**
Maximum elongation	**≥ 100 % (ASTM D 412)**
Temperature resistance	**-10°C to +80°C**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 9010	310 ml	25 pcs
RAL 7040	310 ml	25 pcs
RAL 9004	400 ml	25 pcs
RAL 8003	400 ml	25 pcs
RAL 8016	400 ml	25 pcs

ACRYLICS

SILICONIZED ACRYLIC



PROPERTIES

Siliconized Acrylic Sealant is used for PVC, aluminium and wooden panel installation, joints between door /window frames and the wall, joints at washbasin, bathtub, closets, tiles and ceramic, cracks in walls, wood, plaster, aluminium, brick and concrete.

- Ease of application.
- Form permanently water repellent layer after curing.
- Resistant to weather conditions.
- Remains flexible for a long time after curing.
- Paintable.

APPLICATIONS

1.Contact area must be dry, clean, free from dust, oil and grease. 2. Ensure neat sealant edges mask the areas adjacent to joints with Masking tape. 3. Cut the tip of the cartridge with angle in accordance with size of the surface to be applied on. 4. Place the cartridge in the gun and inject the joint with the sealant. 5. The applied sealant should be smoothed immediately with a wet spatula, tool or finger. Remove masking tape right after smoothing.

TECHNICAL DATA

Base	**Acrylic dispersion**
Consistency	**Soft paste**
pH	**7-9**
Specific gravity	**1,62 ± 0,03 g/cm³ (ASTM D 792)**
Tack-free time	**15 ± 60 min (23°C and 50% RH) (ASTM C 679)**
Maximum elongation	**≥ 100 % (ASTM D 412)**
Temperature resistance	**-10°C to +80°C**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 9010	310 ml	25 pcs
RAL 7040	310 ml	25 pcs
	310 ml	25 pcs
	310 ml	25 pcs
	310 ml	25 pcs



SEALANTS

Acrylics

ACRYLICS

FIRE STOP ACRYLIC



PROPERTIES

Fire resistant acrylic sealant is one component, acrylic emulsion based and specially formulated for being barrier against fire. Suitable for below applications; precast panel joints, control joints in masonry blockwork and sealing around metal ducting/pipework etc.

- Water based, contains no asbestos or fibres.
- Easy application.
- Short surface curing.
- Paintable.
- Good adhesion to concrete and masonry substrates.
- Flexible.

APPLICATIONS

1. Contact area must be dry, clean, free from dust, oil and grease.2. Ensure neat sealant edges mask the areas adjacent to joints with Masking tape.3. Cut the tip of the cartridge with angle in accordance with size of the surface to be applied on.4. Place the cartridge in the gun and inject the joint with the sealant.5. The applied sealant should be smoothed immediately with a wet spatula, tool or finger. Remove masking tape right after smoothing

TECHNICAL DATA

Base	**Acrylic dispersion**
Consistency	**Soft paste**
pH	**7-9**
Specific gravity	**1,56 ± 0,03 g/cm³ (ASTM D 792)**
Tack-free time	**15 ± 60 min (23°C and 50% RH) (ASTM C 679)**
Maximum elongation	**≥ 100 % (ASTM D 412)**
Temperature resistance	**-10°C to +80°C**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**310 ml**	**25 pcs**
☐ **RAL 7040**	**310 ml**	**25 pcs**

ACRYLICS

EXTERIOR SILICONIZED ACRYLIC



PROPERTIES

Water Resistant Acrylic Sealant is a water based general-purpose, flexible sealant which is used for jointing and embedding in building construction. It is easy to apply and compatible with most materials used in construction. It is outdoor rated.

- Form permanently water repellent layer after curing.
- Resistant to weather conditions.
- Remains flexible for a long time after curing. - Paintable.

APPLICATIONS

1.Contact area must be dry, clean, free from dust, oil and grease. 2.Ensure neat sealant edges mask the areas adjacent to joints with masking tape. 3.Cut the tip of the cartridge with angle in accordance with size of the surface to be applied on. 4. Place the cartridge in the gun and inject the joint with the sealant 5. The applied sealant should be smoothed immediately with a wet spatula, tool or finger. Remove masking tape right after smoothing.

TECHNICAL DATA

Base	**Acrylic dispersion**
Consistency	**Soft paste**
pH	**7-9**
Specific gravity	**1,52 ± 0,03 g/cm³ (ASTM D 792)**
Tack-free time	**15 ± 60 min (23°C and 50% RH) (ASTM C 679)**
Maximum elongation	**≥ 100 % (ASTM D 412)**
Temperature resistance	**-10°C to +80°C**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**310 ml**	**25 pcs**
☐ **RAL 7040**	**310 ml**	**25 pcs**



SEALANTS

Acrylics

ACRYLICS

CRACK FILLER



PROPERTIES

Repair Cracks - Plaster Effect is an acrylic sealant designed for repairing plaster before painting.

- Very simple to apply.
- Water repellent after curing.
- Resistant to atmospheric agents, remains elastic.
- Paintable with water-based or oil-based paints.
- Is cleaned with water when still fresh. Very low VOC content.

APPLICATIONS

- Specially designed for the repair of small holes, cracks, holes in plaster, plasterboard, wood, gesso, etc.
- Indoor and outdoor use.

TECHNICAL DATA

Chemical base	**Acrylic dispersion**
Consistency	**Soft paste**
pH	**7-9**
Density	**1,78 ± 0,03 g/ml**
Skin formation time	**15 ± 60 min (23°C and 50% RH)**
Temperature resistance	**-10°C to +80°C**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ RAL 9010	310 ml	12 pcs



SEALANTS

Hybrids

Hybrid polymer sealants and adhesives: strong bond, no solvents, no isocyanates.

HYBRIDS

HYBRID 50 SEALANT



PROPERTIES

Ultra Seal / Shore A50 Universal Hybrid Sealant is a high quality Hybrid Polymer based sealant/adhesive.

- High filling and adhesion capacity, long life.
- Does not contain solvents, silicone or isocyanate.
- Extremely low VOC content.
- Does not form bubbles, even in the presence of humidity/wetness.
- Excellent resistance to UV rays.
- Paintable with water-based paints.
- Does not crack or shrink.
- Excellent adhesion even without primer (a preliminary test may however be recommended).

APPLICATIONS

- Joints in metalworking, conditioning systems, etc.
- Elastic joints in vibrated structures
- Floor and low-movement joints between walls
- Joints in containers, tanks and silos.

TECHNICAL DATA

Chemical base	**Hybrid polymer**
Curing	**With humidity**
Density	**1.56 ± 0.03 g/ml**
Appearance / colour	**Paste, white**
Tack-free time	**Approx. 15 min (23°C and 50% RH)**
Cure rate	**~ 2 mm/ 24 hr (23°C and 50% RH)**
Sagging (ISO 7390)	**0 mm**
E100 Module (ISO 8339)	**> 0,5 N/mm²**
Shore A (ISO 868)	**55 ±5**
Elongation at break % (ISO 37)	**≥ 250%**
Volume loss	**< -3% (23°C and 50% RH)**
Tensile strength (ISO 37)	**1,5 - 2,0 N/mm²**
Temperature resistance	**-40°C to +90°C**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**290 ml**	**12 pcs**

HYBRIDS

EXTERIOR FACADE HYBRID



PROPERTIES

Roof Sealant is a hybrid based, one-component, insulation sealant and adhesive. It can be used in construction; for sealing roof tiles, air ducts, joints of the construction materials, water containers, silos and similar joint parts.

- Adhesion to different types of surfaces.
- Environmental friendly.
- Free of solvent and isocyanate.
- Resistance to UV degradation and weathering conditions.

APPLICATIONS

Surfaces must be clean dry and free from all traces of grease oil wax and dust. To ensure satisfactory conditions for curing do not apply at temperatures below +5°C or above +35°C. Joint width must be between 5mm and 35mm. May be painted with most paints following about 2 hours drying.

TECHNICAL DATA

Chemical base	**Hybrid polymer**
Curing	**With humidity**
Density	**1.38 ± 0.03 g/ml**
Appearance / colour	**Paste, white**
Tack-free time	**Approx. 15-40 min (23°C and 50% RH)**
Cure rate	**~ 2 mm/ 24 hr (23°C and 50% RH)**
Sagging (ISO 7390)	**0 mm**
E100 Module (ISO 8339)	**> 0,5 N/mm²**
Shore A (ISO 868)	**55 ±5**
Elongation at break % (ISO 37)	**≥ 400%**
Volume loss	**< -3% (23°C and 50% RH)**
Tensile strength (ISO 37)	**1,5 - 2,0 N/mm²**
Temperature resistance	**-40°C to +90°C**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**290 ml**	**12 pcs**



SEALANTS

Hybrids

HYBRIDS

ULTRA CLEAR



PROPERTIES

Ultra Clear / Shore A35 Crystalline Hybrid Sealant is a perfectly transparent, elastic, highly thixotropic adhesive. Ideal for both vertical and horizontal applications. Paintable. Does not shrink.

- Does not contain solvents, silicones and isocyanates.
- Strong adhesion on many surfaces.
- Does not foam with moisture.
- Does not require primer.
- Compliant with specification requirements for VOC content.

APPLICATIONS

- Excellent adhesive power even without primer on all of the most common materials such as aluminum, zinc, galvanized steel, stainless steel, copper, stone, concrete, bricks, etc.
- Perfect for application as transparent and elastic bonding in the construction field.
- Bonding and sealing of glass and other transparent materials in indoor applications.

TECHNICAL DATA

Base	**Hybrid polymer**
Curing system	**Moisture hardening**
Density	**1.02 ± 0.03 g/ml**
Appearance	**Paste, transparent**
Tack-free time	**35 min (23°C and 50% RH)**
Cure rate	**~ 2,7 mm/ 24 hr (23°C and 50% RH)**
Shore A	**35 ±5**
Elongation at break	**≥ 300%**
Volume loss	**< -3% (23°C and 50% RH)**
Tensile strength	**1,9 N/mm²**
Temperature resistance	**-40°C to +90°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**290 ml**	**12 pcs**

HYBRIDS

ULTRA TACK



PROPERTIES

Shore A55 Hybrid Adhesive is a one-component, high quality and professional hybrid polymer-based adhesive with high adhesion and very high initial tack. Suitable for bonding heavy construction materials without the use of clamps and/or fixing tapes. Does not contain solvents or isocyanates.

APPLICATIONS

- Developed for adhesion to the widest range of building materials: stone, concrete, mirrors, glass, plasterboard, PU, PVC, polyester, plastic, ceramic, iron, zinc, wood.
- Wall covering elements and ceiling panels, panels for acoustic insulation and thermal insulation.
- Frames and structures in building construction, wooden and plastic laths, ornaments and frames, door steps, window sills, skirting boards and cover plates.

TECHNICAL DATA

Base	**Hybrid polymer**
Curing system	**Moisture hardening**
Density	**1.56 ± 0.03 g/ml**
Appearance	**White paste**
Tack-free time	**5-10 min (23°C and 50% RH)**
Sagging (ISO 7390)	**No sag**
Shore A (ISO 868)	**50 ±5**
Elongation at break % (ISO 37)	**≥ 200%**
Volume loss	**< -3% (23°C and 50% RH)**
Tensile strength (ISO 37)	**3.0-3.5 N/mm²**
Temperature resistance (ISO 37)	**-40°C to +90°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**290 ml**	**12 pcs**
☐ **RAL 9010**	**60 ml**	**12 pcs**



SEALANTS

Hybrids

HYBRIDS

ULTRA SPEED



PROPERTIES

- Easy application.
- Fast bonding and excellent preliminary bond strength in just 20 minutes
- Eco-friendly. - Solvent and isocyanate free.
- Non-sagging.
- Excellent resistance to UV rays, atmospheric agents and aging.
- Resistant to chemicals.
- Excellent adhesion to most building materials.

APPLICATIONS

Ultra Speed is suitable for mounting and gluing together materials such as metal, aluminum, glass, plastic, wood. Can be used for construction, both indoors and outdoors as an elastic adhesive and sealant.

TECHNICAL DATA

Base	**Hybrid polymer**
Curing system	**Moisture hardening**
Density	**1.48 ± 0.03 g/ml**
Appearance	**White paste**
Tack-free time	**3-5 min (23°C and 50% RH)**
Cure rate	**Approx. 2 mm/24 h (23°C and 50% RH)**
Sagging (ISO 7390)	**No sag**
Shore A (ISO 868)	**55 ±5**
Elongation at break % (ISO 37)	**>200%**
Tensile strength (ISO 37)	**>1,7 N/mm²**
Temperature resistance (ISO 37)	**-10°C to +80°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**310 ml**	**12 pcs**

HYBRIDS

ULTRA FLEX



PROPERTIES

- Easy application.
- Solvent and isocyanate free
- Excellent UV resistance, weathering and aging. - Paintable with all types of paints. (including water-based paints).

APPLICATIONS


Ultra Flex is one component, moisture curing, high strength performance hybrid based sealant. Ultra Flex is suitable for mounting and pasting of materials such as metal, aluminum, glass, plastic, wood and concrete with each other (it is not recommended to use in PMMA and polycarbonate type materials and there is no adhesion on PE, PP, PTFE (Teflon®), silicones and bituminous substrates).

TECHNICAL DATA

Base	**Hybrid polymer**
Curing system	**Moisture hardening**
Density	**1.40 ± 0.03 g/ml**
Appearance	**White paste**
Tack-free time	**>40 min (23°C and 50% RH)**
Cure rate	**Approx. 2 mm/24 h (23°C and 50% RH)**
Sagging (ISO 7390)	**No sag**
Shore A (ISO 868)	**55 ±5**
Elongation at break % (ISO 37)	**>200%**
Tensile strength (ISO 37)	**3.0-3.5 N/mm²**
Temperature resistance (ISO 37)	**-40°C to +90°C**
Application temperature	**+5°C to +40°C**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**310 ml**	**12 pcs**

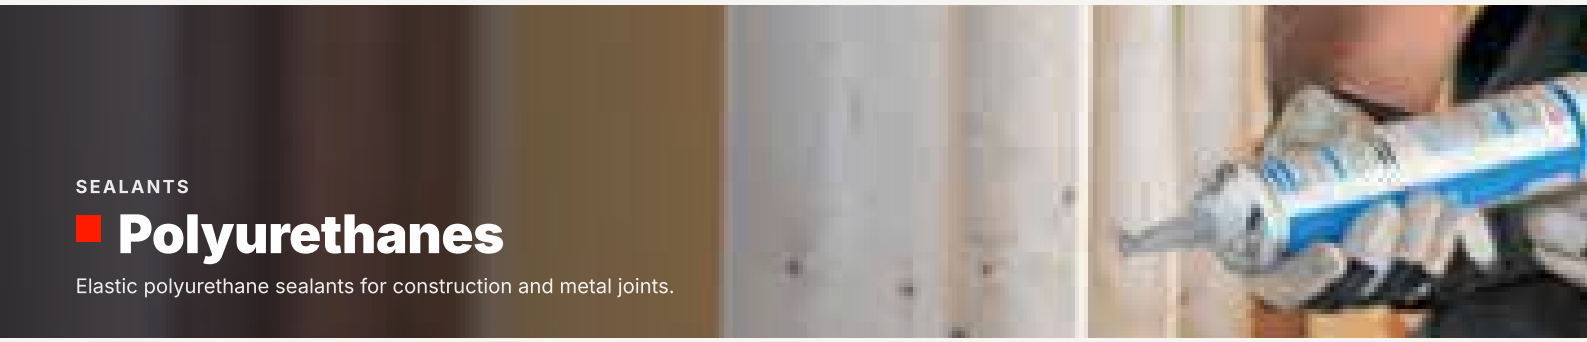

SEALANTS

Polyurethanes

Elastic polyurethane sealants for construction and metal joints.

POLYURETHANES

POLYURETHANE SEALANT 25



PROPERTIES

SPU-40 Polyurethane Sealant for Metal/Construction is a medium modulus one-component polyurethane sealant that cures when exposed to atmospheric humidity. It has excellent adhesion to all of the most common building materials such as concrete, brick, ceramic, glass, wood, galvanized and painted sheet and various plastics. Paintable. Does not vary in volume.

APPLICATIONS

- Exceptional thixotropy.
- Expansion joints in floors, indoor and outdoor applications for pedestrian and busy areas, prefabricated concrete panels.
- Sealing against water, air, gas and dust.

TECHNICAL DATA

Chemical base	**Polyurethane**
Consistency	**Thixotropic**
Polymerization system	**Moisture hardening**
Density	**1,15 ± 0,03 g/ml**
Tack-free time	**60-90 min. (23°C and 50% RH)**
Cure rate	**Min. 2 mm/ Day (23°C and 50% RH)**
Sagging	**0 mm (EN ISO 7390)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**+5°C to +35°C**
Shore A	**40±5 after 28 days (ASTM C661)**
Paintable	**Yes**
Elastic recovery	**≥ 70% (ISO 7389)**
E100 Module (23°C)	**> 0,4 N/mm² (ISO 8339)**
E100 Module (-20°C)	**<0,60 N/mm² (ISO 8339)**
Elongation at break	**500 % (ASTM D412)**
Tensile strength	**1,3 N/mm² (ASTM D412)**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 9010	**310 ml**	**12 pcs**
RAL 7040	**310 ml**	**12 pcs**
Black	**310 ml**	**12 pcs**

POLYURETHANES

POLYURETHANE SEALANT 40 SAUSAGE



PROPERTIES

SPU-40 Polyurethane Sealant for Metal/Construction is a medium modulus one-component polyurethane sealant that cures when exposed to atmospheric humidity. It has excellent adhesion to all of the most common building materials such as concrete, brick, ceramic, glass, wood, galvanized and painted sheet and various plastics. Paintable. Does not vary in volume.

APPLICATIONS


- Exceptional thixotropy.
- Expansion joints in floors, indoor and outdoor applications for pedestrian and busy areas, prefabricated concrete panels.
- Sealing against water, air, gas and dust.

TECHNICAL DATA

Consistency	**Thixotropic**
Polymerization system	**Moisture hardening**
Density	**1.15 ± 0.03 g/ml**
Tack-free time	**60-90 min. (23°C and 50% RH)**
Cure rate	**Min. 2 mm/Day (23°C and 50% RH)**
Sagging	**0 mm (EN ISO 7390)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**+5°C to +35°C**
Shore A	**40±5 after 28 days (ASTM C661)**
Paintable	**Yes**
Elastic recovery	**≥ 70% (ISO 7389)**
E100 Module (23°C)	**0.35-0.40 N/mm² (ISO 8339)**
Elongation at break	**500% (ASTM D412)**
Tensile strength	**1.3±0.02N/mm² (ASTM D412)**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 9010	**600 ml**	**12 pcs**
RAL 7040	**600 ml**	**12 pcs**
RAL 9005	**600 ml**	**12 pcs**

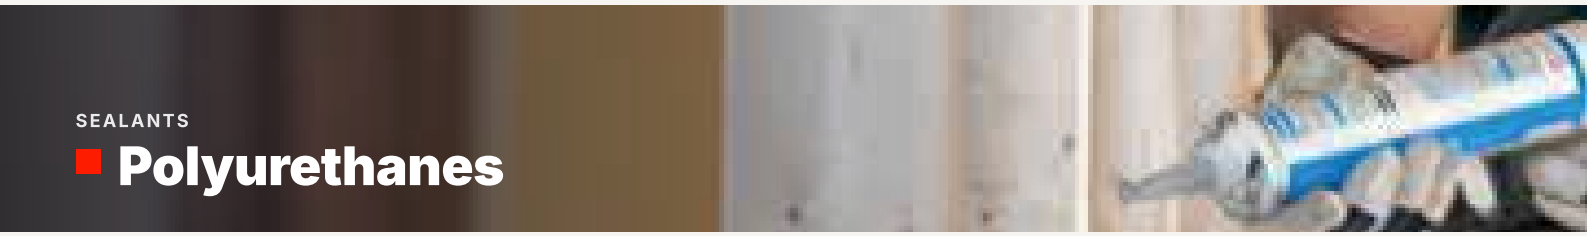

SEALANTS

Polyurethanes

POLYURETHANES

POLYURETHANE SEALANT 50



PROPERTIES

SPU-50 Polyurethane Sealant for Metal/Construction is a medium modulus one-component polyurethane sealant that cures when exposed to atmospheric humidity. It has excellent adhesion to all of the most common building materials such as concrete, brick, ceramic, glass, wood, galvanized and painted sheet and various plastics. Paintable. Does not vary in volume.

APPLICATIONS

- Exceptional thixotropy.
- Expansion joints in floors, indoor and outdoor applications for pedestrian and busy areas, prefabricated concrete panels.
- Sealing against water, air, gas and dust.

TECHNICAL DATA

Consistency	**Thixotropic**
Polymerization system	**Moisture hardening**
Density	**1,15 ± 0,03 g/ml**
Tack-free time	**60-90 min. (23°C and 50% RH)**
Cure rate	**Min. 2,5 mm/ Day (23°C and 50% RH)**
Sagging	**2 mm (EN ISO 7390)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**+5°C to +35°C**
Shore A	**40±5 after 28 days (ASTM C661)**
Paintable	**Yes**
Elastic recovery	**≥70% (ISO 7389)**
E100 Module (23°C)	**0.35-0.40 N/mm² (ISO 8339)**
Elongation at break	**500 % (ASTM D412)**
Tensile strength	**1,3±0,02 N/mm² (ASTM D412)**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 9010	310 ml	12 pcs
RAL 7040	310 ml	12 pcs
Black	310 ml	12 pcs

POLYURETHANES

POLYURETHANE SEALANT 60



PROPERTIES

SPU-50 Polyurethane Sealant for Metal/Construction is a medium modulus one-component polyurethane sealant that cures when exposed to atmospheric humidity. It has excellent adhesion to all of the most common building materials such as concrete, brick, ceramic, glass, wood, galvanized and painted sheet and various plastics. Paintable. Does not vary in volume.

APPLICATIONS


- Exceptional thixotropy.
- Expansion joints in floors, indoor and outdoor applications for pedestrian and busy areas, prefabricated concrete panels.
- Sealing against water, air, gas and dust.

TECHNICAL DATA

Consistency	**Thixotropic**
Polymerization system	**Moisture hardening**
Density	**1.15 ± 0.03 g/ml**
Tack-free time	**60-90 min. (23°C and 50% RH)**
Cure rate	**Min. 2.5 mm/Day (23°C and 50% RH)**
Sagging	**2 mm (EN ISO 7390)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**+5°C to +35°C**
Shore A	**50±5 after 28 days (ASTM C661)**
Paintable	**Yes**
Elastic recovery	**≥ 70% (ISO 7389)**
E100 Module (23°C)	**1.0-0.40 N/mm² (ISO 8339)**
Elongation at break	**450% (ASTM D412)**
Tensile strength	**1.5 N/mm² (ASTM D412)**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 9010	600 ml	12 pcs
RAL 7040	600 ml	12 pcs
RAL 9005	600 ml	12 pcs

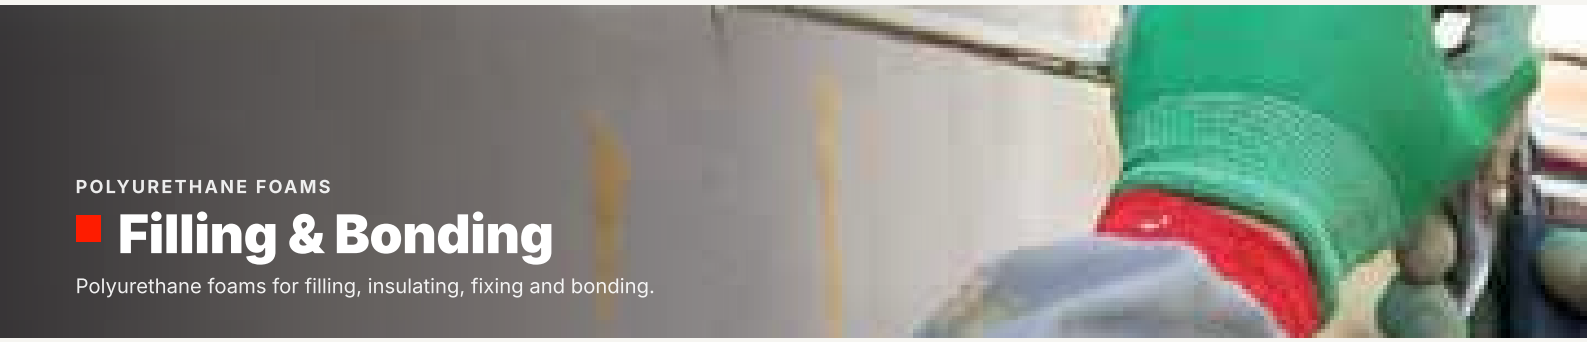

POLYURETHANE FOAMS

Filling & Bonding

Polyurethane foams for filling, insulating, fixing and bonding.

FILLING & BONDING

POLYURETHANE FOAM (MANUAL) – YELLOW



PROPERTIES

Polyurethane Foam (Manual) is a one-component, self-hardening and self-expanding polyurethane foam. Ideal for filling and insulation operations. Does not contain propellant gases harmful to the ozone layer.

APPLICATIONS

- Filling and sealing of slits, particularly large joints and cavities.
- Fixing and insulation of windows and doors.
- Filling holes in walls.
- Insulation of electrical outlets and water pipes.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**23±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**7±3 min (ASTM C1620)**
Cutting time (L 1cm)	**15-30 min (ASTM C1620)**
Fire resistance after crosslinking	**B3 (DIN 4102-1)**
Compressive strength	**43 kPa (DIN 53421)**
Tensile strength	**65,31 kPa (ISO 1926-79)**
Colour	**Light yellow**
Yield	**30-45 L (ASTM C1536)**
Dimensional stability	**-0,62% (ISO 2796/86)**
Can temperature	**min. 20°C max. +25°C**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**

PACKAGING

SIZE	PER BOX
750 ml / 845 g	**12 pcs**

FILLING & BONDING

POLYURETHANE FOAM (GUN) – YELLOW



PROPERTIES

Polyurethane Foam (Gun) is a one-component, self-hardening and self-expanding polyurethane foam. Ideal for filling and insulation operations. Does not contain propellant gases harmful to the ozone layer.

APPLICATIONS

- Filling and sealing of particularly large cracks, joints and cavities.
- Fixing and insulation of doors and windows.
- Filling of holes in walls.
- Insulation of electrical outlets and water pipes.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**20±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**6 min (ASTM C1620)**
Cutting time (L 1cm)	**25 min (ASTM C1620)**
Fire resistance after crosslinking	**B3 (DIN 4102-1)**
Compressive strength	**25 kPa (DIN 53421)**
Tensile strength	**35,7 kPa (ISO 1926-79)**
Colour	**Light yellow**
Yield	**30-45 L (ASTM C1536)**
Dimensional stability	**-1,66 % (ISO 2796/86)**
Can temperature	**min. 20°C max. +25°C**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**

PACKAGING

SIZE	PER BOX
750 ml / 845 g	**12 pcs**



POLYURETHANE FOAMS

Filling & Bonding

FILLING & BONDING

POLYURETHANE FOAM (MANUAL) – BLUE



PROPERTIES

Polyurethane Foam (Manual) is a one-component, self-hardening and self-expanding polyurethane foam. Ideal for filling and insulation operations. Does not contain propellant gases harmful to the ozone layer.

APPLICATIONS

- Filling and sealing of slits, particularly large joints and cavities.
- Fixing and insulation of windows and doors.
- Filling holes in walls.
- Insulation of electrical outlets and water pipes.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**23±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**6 min (ASTM C1620)**
Cutting time (L 1cm)	**15-30 min (ASTM C1620)**
Fire resistance after crosslinking	**B3 (DIN 4102-1)**
Compressive strength	**46,9 kPa (DIN 53421)**
Tensile strength	**92,9 kPa (ISO 1926-79)**
Colour	**Light yellow**
Yield	**30-45 L (ASTM C1536)**
Dimensional stability	**-1,33 % (ISO 2796/86)**
Can temperature	**min. 20°C max. +25°C**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**

PACKAGING

SIZE	PER BOX
750 ml / 600 g	**12 pcs**

FILLING & BONDING

POLYURETHANE FOAM (GUN) – BLUE



PROPERTIES

Polyurethane Foam (Gun) is a one-component, self-hardening and self-expanding polyurethane foam. Ideal for filling and insulation operations. Does not contain propellant gases harmful to the ozone layer.

APPLICATIONS

- Filling and sealing of particularly large cracks, joints and cavities.
- Fixing and insulation of doors and windows.
- Filling of holes in walls.
- Insulation of electrical outlets and water pipes.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**23±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**5-6 min (ASTM C1620)**
Cutting time (L 1cm)	**15-30 min (ASTM C1620)**
Fire resistance after crosslinking	**B3 (DIN 4102-1)**
Compressive strength	**41,8 kPa (DIN 53421)**
Tensile strength	**82,9 kPa (ISO 1926-79)**
Colour	**Light yellow**
Yield	**30-45 L (ASTM C1536)**
Dimensional stability	**-0.29 % (ISO 2796/86)**
Can temperature	**min. 20°C max. +25°C**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**

PACKAGING

SIZE	PER BOX
750 ml / 600 g	**12 pcs**



POLYURETHANE FOAMS

Filling & Bonding

FILLING & BONDING

PU ADHESIVE FOAM (MANUAL)



PROPERTIES

Foam for Pantiles and Tiles, Insulating Panels and Plasterboard (Manual is a one-component polyurethane adhesive foam that cures rapidly with humidity, with controlled expansion. Provides very strong and fast adhesion on various building materials

APPLICATIONS

- Ideal for fixing tiles and pantiles, thermal and acoustic insulation panels, plasterboard sheets.
- Recommended for bonding wood and concrete building materials.
- Ideal for applications requiring minimal foam expansion (door and window installation).

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**21±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**6±2 min (ASTM C1620)**
Cutting time (L 1cm)	**30-40 min (ASTM C1620)**
Colour	**Pink**
Yield	**45-55 L (ASTM C1536)**
Coverage area	**Up to 5-10 m²**
Fire resistance after crosslinking	**B3,E (DIN 4102-1) (EN 13501-1)**
Compressive strength	**50,2 kPa (DIN 53421)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**
Tensile strength	**79,3 kPa**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**

FILLING & BONDING

PU ADHESIVE FOAM (GUN)



PROPERTIES

oam for Pantiles and Tiles, Insulation and Plasterboard (Gun) is a one-component polyurethane adhesive foam that cures rapidly with humidity, with controlled expansion. Provides very strong and fast adhesion on various building materials

APPLICATIONS

- Ideal for fixing tiles and pantiles, thermal and acoustic insulation panels, plasterboard sheets.
- Recommended for bonding wood and concrete building materials.
- Ideal for applications requiring minimal foam expansion (door and window installation).

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**17±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**6±2 min (ASTM C1620)**
Cutting time (L 1cm)	**30 min (ASTM C1620)**
Crosslinking time	**24 hours**
Colour	**Pink**
Yield	**45-55 L (ASTM C1536)**
Coverage area	**Up to 5-10 m²**
Fire resistance after crosslinking	**B3,E (DIN 4102-1) (EN 13501-1)**
Compressive strength	**50,2 kPa (DIN 53421)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**
Tensile strength	**79,3 kPa**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**



POLYURETHANE FOAMS

Filling & Bonding

FILLING & BONDING

FAST CURING ADHESIVE FOAM



PROPERTIES

Fast Curing Adhesive Foam is a one-component polyurethane foam that is cured by action of the moisture present in the air. It can be used for bonding polystyrene sheets (XPS or EPS) used in the thermal insulation of buildings and structural elements such as decorative jambs. It can also be applied to fill and insulate the spaces between the building elements (therefore excellent, given also its low post expansion, for the assembly of windows and doors).

APPLICATIONS

During application, the panel and the gun must be perpendicular, and the distance maintained should allow continuous application. Foam should be applied along the edges of the panel while maintaining a distance of about 2 cm from the edges. The panel should be applied immediately after applying the foam and must be pressed against the wall. After fixing a certain number of panels, they must be aligned with a levelling ruler, and the excess foam should be wiped with a spatula or cutter (or a cloth if still damp).

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**18±2 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**2 min (ASTM C1622)**
Cutting time (L 1cm)	**10-15 min (ASTM C1620)**
Fire resistance after crosslinking	**B3 (DIN 4102-1)**
Compressive strength	**17,38 kPa (DIN 53421)**
Tensile strength	**45,11 kPa (ISO 1926-79)**
Colour	**Light yellow**
Yield	**30-45 L (ASTM C1536)**
Dimensional stability	**-5% (ISO 2796/86)**
Can temperature	**min. 20°C max. +25°C**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**

FILLING & BONDING

QUICK COVER THERMAL FOAM



PROPERTIES

Fast Foam for Thermal insulation is a high quality, one-component insulating polyurethane foam. Quickly provides good thermal and acoustic insulation even on large areas. Can be used on uneven surfaces and hard-to-reach places where it is not possible to use traditional insulating materials.

APPLICATIONS

The application surface must be clean, dry, free from dust and oil or grease. The can must be shaken vigorously for about 25/30 times before use. Moisten the application surfaces by spraying water on them (this facilitates perfect cross-linking of the foam). Always keep the can upside down during application. Screw the can on the gun. The amount of foam can be adjusted by pressing the trigger or by acting on the screw adjustment on the back of the gun. For vertical application (walls), spray the foam from a distance of about 30 cm from the surface. For horizontal application (ceiling), spray from a distance of 15-20 cm. The product can (and should) be applied in layers, more layers provide better insulation.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**15-20 kg/m³ (ASTM C1620)**
Tack-free time (L 1cm)	**5 min (ASTM C1622)**
Cutting time (L 1cm)	**60 min (ASTM C1620)**
Crosslinking time	**60 min**
Fire resistance after crosslinking	**B3 (DIN 4102-1)**
Thermal conductivity	**0,025-0,03 W/m.K**
Colour	**Blue**
Can temperature	**min. 20°C max. +25°C**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**



POLYURETHANE FOAMS

Filling & Bonding

FILLING & BONDING

STONE & BRICK ADHESIVE



PROPERTIES

Thanks to its "collapsing gel technology", Stone & Brick Adhesive foam is the ideal solution for laying adjusted blocks and bricks, stone in general and concrete. The particular formulation means that the foam, instead of swelling, reduces its volume after extrusion, creating a powerful adhesive film that guarantees perfect solidity of the product, avoiding excessive thickness (and hence useless and harmful thermal bridges). It is a one-component polyurethane foam that is cured by action of the moisture present in the air.

APPLICATIONS

The can must be shaken vigorously about 25/30 times before use, then screwed onto the special dispensing gun. The quantity of foam dispensed can be adjusted by pressing the trigger or by acting on the screw adjustment on the back of the gun. It is in gel form, it does not expand once extruded. Moisten the application surfaces by spraying water on them (this facilitates perfect cross-linking of the foam). Keep the can upright during application. Apply the foam on the surfaces (2 lines of adhesive parallel to each other and 5 to 10 cm apart) and press to make them adhere.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Tack-free time (L 1cm)	**2-3 min (ASTM C1622)**
Full curing time	**48 hours**
Shear bond strength	**10-15 N/mm²**
Initial grab	**15 min**
Open time	**<2 min**
Colour	**Light yellow**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**

FILLING & BONDING

LOW EXPANSION FOAM



PROPERTIES

Low Expansion Foam is designed for a wide range of building applications; mounting, sealing, filling and insulating. Low pressure formula prevents the bending of window frames. For fixation of doors, window and door frames, for filling of holes and cracks and to insulate hot and cold water pipes.

APPLICATIONS

Shake the can well approximately 20-25 times before use. Turn the dosage trigger and insert the valve or into the gun. The surface should be free of dirt, dust and grease; and to accelerate the reaction and have the best result the surface and the foam should be wet. Use the can in upside down position. The dried pieces of PU Foam should be removed from the valve or the gun, it can be cleaned by using Foam Cleaner. Please take into account that the volume of the foam expands.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**15±3 kg/m³ (ASTM C1620)**
Tack-free time (L 1cm)	**10 min (ASTM C1622)**
Cutting time (L 1cm)	**15-30 min (ASTM C1620)**
Fire resistance after crosslinking	**B3 (DIN 4102-1)**
Colour	**Yellow**
Can temperature	**min. 20°C max. +25°C**
Temperature resistance	**-30°C to +80°C**
Application temperature	**5°C to +35°C**
Tensile strength	**44,2 kPa**
Compressive strength	**19,9 kPa**
Dimensional stability	**-1,09 %**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**



POLYURETHANE FOAMS

Filling & Bonding

FILLING & BONDING

B1 FIRE-RESISTANT FOAM (MANUAL)



PROPERTIES

Fire-Resistant Foam (Manual) is a one-component, self-expanding polyurethane foam containing propellants that are completely harmless to the ozone layer. Ideal where a high resistance to fire is required, guaranteeing a flame retardancy up to 240 minutes (B1).

APPLICATIONS

- All applications where flame retardant properties are required.
- Installation of windows, filling and sealing of empty spaces, joints and cavities.
- Filling of holes in walls.
- Thermal insulation in the construction of roofs, sealing of cables and pipes, bonding of insulating materials.
- Multi-purpose, adhesion and fixing.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**17±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**6±2 min (ASTM C1620)**
Cutting time (L 1cm)	**15-30 min (ASTM C1620)**
Colour	**Light orange**
Yield	**45-50L (ASTM C1536)**
Post expansion	**86%**
Fire resistance after crosslinking	**B1 (DIN 4102)**
Compressive strength	**41,5 kPa (DIN 53421)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**+5°C to +30°C**
Can temperature	**+20°C to +25°C**
Dimensional stability	**-0,87 %**
Tensile strength	**104,8 kPa**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**

FILLING & BONDING

B1 FIRE-RESISTANT FOAM (GUN)



PROPERTIES

Fire-Resistant Foam (Gun) is a one-component, self-expanding polyurethane foam containing propellants that are completely harmless to the ozone layer. Provides resistance to fire, guaranteeing a flame retardancy up to 240 minutes (B1)

APPLICATIONS

- All applications where flame retardant properties are required.
- Installation of windows, filling and sealing of empty spaces, joints and cavities.
- Filling of holes in walls.
- Thermal insulation in the construction of roofs, sealing of cables and pipes, bonding of insulating materials.
- Multi-purpose, adhesion and fixing.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Polymerization system	**Moisture hardening**
Specific gravity	**17±3 kg/m³ (ASTM D1622)**
Tack-free time (L 1cm)	**6±2 min (ASTM C1620)**
Cutting time (L 1cm)	**15-30 min (ASTM C1620)**
Colour	**Light orange**
Yield	**45-50L (ASTM C1536)**
Post expansion	**86%**
Fire resistance after crosslinking	**B1 (DIN 4102)**
Compressive strength	**41,5 kPa (DIN 53421)**
Temperature resistance	**-30°C to +80°C**
Application temperature	**+5°C to +30°C**
Can temperature	**+20°C to +25°C**
Dimensional stability	**-0,87 %**
Tensile strength	**104,8 kPa**

PACKAGING

SIZE	PER BOX
750 ml	**12 pcs**



POLYURETHANE FOAMS

Filling & Bonding

FILLING & BONDING

DUAL VALVE FOAM



PROPERTIES

Dual Valve is multipurpose, ready-to-use polyurethane foam and can be used for filling and hardening, offering the quality of gun-grade foam with the ease of use of handheld valve. With its special 360° valve, can be applied at any angle. For fixation of doors, windows and doors frames, for filling spaces, to isolate hot and cold water pipes, to stuff up holes and cracks.

APPLICATIONS

Shake the can well, approximately 20-25 times before usage. Screw application nozzle or gun onto the valve. The surface should be free of dirt, dust and grease and to accelerate the reaction, and to have the best result, the surface should be moistened. Use the can in "bottom up" position . The dried pieces of foam should be removed from the valves and pipes, it can be cleaned by using Foam Cleaner. Take into account that the volume of foam tends to expand.

TECHNICAL DATA

Base	**Mixture of solvents**
Consistency	**Liquid**
Appearance	**Transparent**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**500 ml**	**12 pcs**

FILLING & BONDING

FOAM CLEANER



PROPERTIES

Spray Cleaner for Foam is a cleaner that removes fresh polyurethane foams from the spray guns after use. Cleans surfaces, clothing, door and window frames, and prevents hardening inside the dispensing guns.

- Specifically formulated for cleaning polyurethane foams.
- The cleaner is equipped with a valve to remove the foam from the adapter of the dispensing gun.
- Can be used in all positions.
- The propellant gas used is not harmful.

APPLICATIONS

- Screw the cleaner package tightly onto the gun and spray.
- When the period between applications is longer than a week, do not fit a new foam pack after removing the cleaner from the gun.
- It can also be used by means of the supplied spray nozzle.

TECHNICAL DATA

Base	**Mixture of solvents**
Consistency	**Liquid**
Appearance	**Transparent**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**500 ml**	**12 pcs**



GLUES & ADHESIVES

Quick Set

Fast-setting adhesives for skirting boards and wood.

QUICK SET

ACRYLIC SKIRTING ADHESIVE



PROPERTIES

Acrylic Mounting Adhesive is an acrylic-based adhesive used for bonding numerous building materials. Particularly suitable for do-it-yourself uses thanks its solventless formulation and strong adhesive capacity. Solvent free.

- Acrylic dispersion.
- Good filling capacity even on rough surfaces.
- Suitable for indoor and outdoor applications.
- Resistant to atmospheric agents.
- Over paintable.
- Low odor emission.

APPLICATIONS

- Bonding of materials such as wood, non-polished stones, concrete, plaster, tiles, panels, synthetic building materials, etc.
- Assembly of wooden building elements, wooden panels, plaster decorations, finishes.
- Quick repairs on walls or cracks in the plaster.
- Suitable surfaces: MDF, chipboard, expanded polystyrene, masonry, tiles, ceramic, stone, plasterboard

TECHNICAL DATA

Base	**Acrylic dispersion**
Density	**1.48 ± 0.03 g/cm³ (ASTM D1875)**
Tack-free time	**30-60 min. (at 25°C and 50% RH) (ASTM C 679)**
Rate of cross-linking	**2 mm/Day (at 25°C and 50% RH)**
Temperature resistance	**-10°C to +80°C**
Application temperature	**+5°C to +40°C**
Shear strength (beech-beech), after 6 hours	**> 8-10 kgf/cm²**
Shear strength (beech-beech), after 24 hours	**> 20-22 kgf/cm²**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**310 ml**	**25 pcs**

QUICK SET

PU D4 EXPRESS ADHESIVE



PROPERTIES

Quick Mounting Adhesive is a fast-curing mono-component polyurethane adhesive. Has high water resistance and adhesion strength. Fast polymerization.

- Short pressing time.
- Transparent.
- Meets D4 specs according to DIN EN 204.
- Excellent resistance to chemical agents.
- Excellent resistance to humidity and atmospheric conditions.
- Shrink-free.
- Low odor emission.
- Can be used on slightly wet substrates.

APPLICATIONS

- Fixing and gluing of wooden elements to other porous and non-porous elements such as wood, metal, concrete, expanded polystyrene and other plastics.
- Furniture manufacture and boat building.
- Fixing of raised floor installations in combination with mechanical devices.
- All bonding applications that require high water resistance.

TECHNICAL DATA

Base	**Polyurethane prepolymer**
Colour	**Transparent**
Density	**1.15 ± 0.03 g/ml**
Tack-free time	**5 - 10 min (At 23°C and 50% RH)**
Consistency	**Thixotropic**
Shrink	**None**
Pressing time	**15 - 20 min**
Temperature resistance	**-40°C to +90°C**
Application temperature	**+5°C to +35°C**
Maximum shear strength (beech-beech), after 24 hours	**8-9 N/mm²**
Maximum shear strength (beech-beech), after 7 days	**>10 N/mm²**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**300 ml**	**12 pcs**



GLUES & ADHESIVES

Assembly & Wood Glues

Assembly adhesive and D3 water-resistant wood glue.

ASSEMBLY & WOOD GLUES

MONTAGE KIT



PROPERTIES

Solvent Based Adhesive is a quick adhesive for panels and is also ideal for filling. Adhesive based on a synthetic rubber/resin mixture with high adhesion strength in a solvent environment. Particularly suitable for fixing materials such as wood, concrete, plastic, stone, friezes, brackets, cabinet covers, PVC, mounting panels, etc

APPLICATIONS

- Solvent-based formula: fast drying / high initial adhesive strength.
- Excellent adhesion strength: adheres to most common surfaces.
- Exceptional early setting properties, usable both in vertical and horizontal position.
- Formulations with high solids content and excellent non-shrinkage gap filling properties.
- Excellent resistance to external atmospheric agents, suitable for outdoor use.
- Product not suitable for expanded polystyrene, polypropylene, polyethylene and Teflon.

TECHNICAL DATA

Base	**Mixture of resins and rubber (solvent based)**
Appearance	**Beige paste**
Density	**1.24 g/cm³**
Tack-free time	**< 30 seconds**
Tensile strength	**5 N/mm²**
Volume loss	**27%**
Application temperature	**+5°C / +35°C**
Temperature resistance	**-40°C / +90°C**

PACKAGING

SIZE	PER BOX
290 ml	**12 pcs**

ASSEMBLY & WOOD GLUES

D3 WOOD GLUE



PROPERTIES

Vinyl+D3 is a ready-to-use, water-resistant vinyl adhesive for wood based on a homopolymer emulsion of polyvinyl acetate. Specially formulated to comply with EN 204 (D3 = Water resistant).

APPLICATIONS


- Suitable for bonding all types of wood, wooden products and flat laminates.
- Wood on wood, soft and hard panels, synthetic resin panels and synthetic chipboard panels.
- Suitable for fixing paper, cardboard, paper or PVC fabric, on wood and cardboard.
- Can also be used to bond outdoor wooden structures such as window frames and exterior doors.
- Particularly suitable for moisture-resistant bonding which must meet high demands.

TECHNICAL DATA

Base	**Vinyl acetate polymer**
Appearance	**Creamy white**
Solids content (%)	**40**
Viscosity	**9000 ± 18000 cPs at 20°C (spindle no. 6, 20 rpm)**
Wood moisture	**12-20 %**
pH	**4-5**
Water resistance class	**D3 (DIN EN204)**
Adhesive consumption	**100-200 g/m²**
Open time	**5-10 minutes (23°C, 50% RH)**
Working time	**10-15 minutes (23°C, 50% RH)**
Total curing time	**24 hours (minimum)**

PACKAGING

COLOUR	SIZE	PER BOX
☐ **RAL 9010**	**500 g**	**12 pcs**
☐ **RAL 9010**	**1 kg**	**12 pcs**
☐ **RAL 9010**	**5 kg**	**12 pcs**

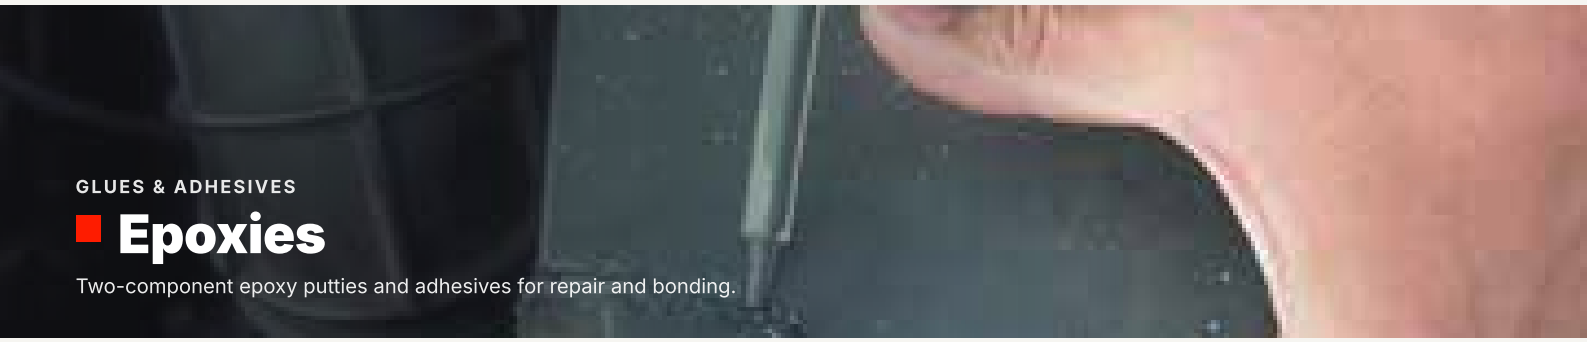

GLUES & ADHESIVES

Epoxies

Two-component epoxy putties and adhesives for repair and bonding.

EPOXIES

EPOXY PUTTY



PROPERTIES

Epoxy putty is a two-component epoxy adhesive; consist of Epoxy resin and Mercaptane Terminated Hardener (1-1). It is suitable for the application of filling cracks, holes; repairing of concrete surfaces, tanks, drums and containers.

- Excellent Adhesion
- Good Heat Resistant
- Good water resistance (Suitable to underwater applications)
- Excellent adhesion - wood to metal, wood to glass and wood to ceramic
- No shrinkage and volume loss

TECHNICAL DATA

Base	**Epoxy**
Density (g/cm³)	**Resin 1,9**
Hardener	**15000**
Application temperature	**+5°C to +35°C**
Mixing ratio	**1: 1**
Final appearance	**Grey**
Initial curing time	**5-10 (at 23°C)**
Cross-linking time	**24 hours (at 23°C)**
Temperature of use	**+5°C to +35°C**
Filling capacity	**Good**
Shore D	**75 ± 2 (after 7 days)**
Paintable	**Yes (but confirm by tests)**
Sandable	**Yes**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**

EPOXIES

PLASTIC EPOXY PUTTY



PROPERTIES

Epoxy putty plastic is a two-component epoxy adhesive; consist of Epoxy resin and Mercaptane Terminated Hardener (1-1). It is suitable for the application of rigid and semi-flexible plastic, ABS, PVS and CPVC pipes, automotive bumpers, fiberglass parts, vinyl siding.

TECHNICAL DATA

Base	**Epoxy**
Density (g/cm³)	**1,9**
Application temperature	**+5°C to +35°C**
Mixing ratio	**1: 1**
Final appearance	**Off White**
Initial curing time	**5-10 (at 23°C)**
Cross-linking time	**24 (at 23°C)**
Temperature of use	**+5°C to +35°C**
Filling capacity	**Good**
Shore D	**75 ± 2 (after 7 days)**
Paintable	**Yes (but confirm by tests)**
Sandable	**Yes**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**



GLUES & ADHESIVES

Epoxies

EPOXIES

WOOD EPOXY PUTTY



PROPERTIES

Epoxy putty wood is a two-component epoxy adhesive; consist of Epoxy resin and Mercaptane Terminated Hardener (1-1). It is suitable for the application rotted or damaged wood, repairs to doors, windows and furniture, exterior columns, windows frames, large cracks and major repairs.

- Excellent Adhesion
- Good Heat Resistant
- Good water resistance (Suitable to underwater applications)

TECHNICAL DATA

Base	**Epoxy**
Density (g/cm³)	**1,9**
Application temperature	**+5°C to +35°C**
Mixing ratio	**1: 1**
Final appearance	**Beige**
Curing time	**5-10 (at 23°C)**
Cross-linking time	**24 hours (at 23°C)**
Temperature of use	**+5°C to +35°C**
Filling capacity	**Good**
Shore D	**75 ± 2 (after 7 days)**
Paintable	**Yes (but confirm by tests)**
Sandable	**Yes**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**

EPOXIES

STEEL EPOXY PUTTY



PROPERTIES

Epoxy putty steel is a two-component epoxy adhesive; consist of Epoxy resin and Mercaptane Terminated Hardener (1-1). It is suitable for the automotive and machine parts, exhaust systems, plumbing, stripped threads, rust damage, household repairs.

- Excellent Adhesion
- Good Heat Resistant
- Good water resistance (Suitable to underwater applications)

TECHNICAL DATA

Base	**Epoxy**
Density (g/cm³)	**1,9**
Application temperature	**+5°C to +35°C**
Mixing ratio	**1: 1**
Final appearance	**Grey**
Initial curing time	**5-10 min (at 23°C)**
Cross-linking time	**24 hours (at 23°C)**
Temperature of use	**+5°C to +35°C**
Filling capacity	**Good**
Shore D	**75 ± 2 (after 7 days)**
Paintable	**Yes (but confirm by tests)**
Sandable	**Yes**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**



GLUES & ADHESIVES

Epoxies

EPOXIES

EPOXY ADHESIVE



PROPERTIES

Fast Setting Epoxy Adhesive is a two-component, solvent-free, fast-curing and extremely resistant multipurpose epoxy-based adhesive

APPLICATIONS

- Bonding of wood, glass, crystal, ceramic, porcelain, marble, metal, fiberglass, leather, rubber, fabric and rigid plastic surfaces.
- Sealing of electrical components.
- Repair of furniture and household items, household materials. Not recommended for polyethylene, polypropylene, nylon, PTFE, plastics

TECHNICAL DATA

Base	**Epoxy**
Density, resin (g/cm³)	**Resin 1.17 g/cm³**
Density, hardener	**1,15 g/cm³**
Viscosity, resin (cPs, 25°C)	**11.500-13.500**
Viscosity, hardener	**15000**
Application temperature	**+20°C to +80°C**
Mixing ratio	**1:1**
Gel time	**4-10 min (at 23°C)**
Total cure time	**24 hours (at 23°C)**
Temperature of use	**+5°C to +35°C**
Shore D	**80 ± 2 (after 7 days)**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**

EPOXIES

WATERPROOF ADHESIVE



PROPERTIES

Waterproof is a fast cure two-component adhesive based on epoxy. Dispenses equal amounts of each component every time. Can be applied on ceramic, wood and some rubber types. (Not suitable for PP, PE and Teflon) After application should not be touched around 2 hours. Resistant to water, alkalis and diluted acid solutions. No color change, cracking or shrinkage during hardening period. Over paintable, can be sandpapered and drilled.

APPLICATIONS

1. The surfaces must be clean and free from dust and grease. 2. Dispense the components equally (1:1 ratio) and mix until a homogen mixture is obtained. 3. Apply adhesive to the both surfaces to be bonded as quickly as possible and adhere surfaces immediately. 4. Keep the assembled parts from moving during cure and fix.

TECHNICAL DATA

Base	**Epoxy**
Density, resin (g/cm³)	**Resin 1.17 g/cm³**
Density, hardener	**1,15 g/cm³**
Viscosity, resin (cPs, 25°C)	**11.500-13.500**
Viscosity, hardener	**15000**
Application temperature	**+20°C to +80°C**
Mixing ratio	**1:1**
Working time	**8-12 (at 23°C)**
Cross-linking time	**16 hours (at 23°C)**
Temperature of use	**+5°C to +35°C**
Shore D	**83 ± 3 (after 7 days)**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**



GLUES & ADHESIVES

Epoxies

EPOXIES

METAL ADHESIVE



PROPERTIES

Steel Epoxy Adhesive is a two-component, epoxy-based, solvent-free adhesive. Fast curing and extremely strong, which develops high strength. Its filling capacity makes this adhesive particularly suitable for rough surfaces

APPLICATIONS

- Bonding of metal, conc rete, wood, glass and ceramic.
- Ideal for repairing machinery, appliances, tools, automotive components, pipes, etc.
- Fixing of bolts and screws in metal, concrete or stone, electrical components

TECHNICAL DATA

Base	**Epoxy**
Density, resin (g/cm³)	**Resin 1.17 g/cm³**
Density, hardener	**1,15 g/cm³**
Viscosity, resin (cPs, 25°C)	**11.500-13.500**
Viscosity, hardener	**15000**
Application temperature	**+20°C to +80°C**
Mixing ratio	**1:1**
Gel time	**4-10 min (at 23°C)**
Total cure time	**24 hours (at 23°C)**
Temperature of use	**+5°C to +35°C**
Shore D	**80 ± 2 (after 7 days)**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**

EPOXIES

PLASTIC WELDING



PROPERTIES

Plastic Welding -MMA set is a methylmethacrylate based adhesive suitable for general purpose bonding of a wide variety of materials. Can be applied on ceramic, wood, many rigid plastics, china tile, fiberglass, concrete and stone. (The product is not suitable for PE, PP.) Two-component (Component A+ Component B)-Excellent adhesion-Good water resistance Resistant to chemicals

APPLICATIONS

The surfaces must be clean and free from dust and grease. 2. Dispense the components equally (1:1 ratio) and mix until a homogen mixture is obtained. 3. Apply adhesive to the both surfaces to be bonded as quickly as possible and adhere surfaces immediately. 4. Keep the assembled parts from moving during cure and fix.

TECHNICAL DATA

Base	**Epoxy**
Density, resin (g/cm³)	**Resin 0,97 g/cm³**
Density, hardener	**0,97 g/cm³**
Viscosity, resin (cPs, 25°C)	**120000-160000 cPs**
Viscosity, hardener	**150000-200000 cPs**
Application temperature	**+18°C to +25°C**
Mixing ratio	**1:1**
Working time	**4-7 (at 23°C)**
Cross-linking time	**13-16 hours (at 23°C)**
Temperature of use	**+50°C to +120°C**

PACKAGING

SIZE	PER BOX
28 g	**12 pcs**



GLUES & ADHESIVES

Super Glues & Fire Sealant

Instant cyanoacrylate glues and a 1500°C fire sealant.

SUPER GLUES & FIRE SEALANT

CYANOACRYLATE GLUE WITH ACTIVATOR



PROPERTIES

Cyanoacrylate Glue with Activator is a bonding kit consisting of a cyanoacrylate adhesive and activator. Bonds quickly within seconds. Thanks to its high viscosity formula it can also be used vertically without drippings or stains. The activator also enables and accelerates to bond porous surfaces.

APPLICATIONS

- Assembly and repair of parts in natural stone, marble, granite, wood, leather, metal and many other types of substrate.
- Ideal for those applications that require very quick bonding.

TECHNICAL DATA

Glue base	**Ethyl cyanoacrylate**
Form	**Liquid gel**
Colour	**Transparent**
Application temperature	**+5°C to +35°C**
Density	**1,05±0,05 g/cm³ ASTM D1875**
Activator	**Solvent based**
Form	**Aerosol**
Colour	**Transparent**
Application temperature	**+5°C to +35°C**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**100 ml**	**36 pcs**

SUPER GLUES & FIRE SEALANT

SUPER GLUE



PROPERTIES

Cyanoacrylate Glue is a super fast, fast setting and low viscosity glue, developed on the basis of cyanoacrylate adhesive. Ideal where extremely rapid polymerization and / or high penetration capacity is required.

- Strong grip in seconds.
- Resistant to petrol and oils.
- Resists sudden changes in temperature and atmospheric agents

APPLICATIONS

- Suitable for glass, copper, rubber, metals, ceramics, ABS, polystyrene, NBR, nitrile, nylon, phenol, polycarbonate, wood, chromium, cellulose, chloroprene, marble, aluminum, Bakelite, bronze, ceramic, rigid and soft PVC, steel, stainless steel and various types of other materials.

TECHNICAL DATA

Glue base	**Ethyl cyanoacrylate**
Form	**Liquid gel**
Colour	**Transparent**
Application temperature	**+5°C to +35°C**
Density	**1,05±0,05 g/cm³ ASTM D1875**

PACKAGING

COLOUR	SIZE	PER BOX
Transparent	**20 g**	**50 pcs**



GLUES & ADHESIVES

Super Glues & Fire Sealant

SUPER GLUES & FIRE SEALANT

FIRE SEALANT



PROPERTIES

Fire Sealant is a mastic based on sodium silicate and with its special formulation it is designed to withstand up to 1500°C. Purpose-designed for sealing and assembling stoves, ovens, barbecues. 1. Fast hardening. 2. Low odor. 3. Solvent free. 4. No cracking

APPLICATIONS

Ideal for sealing and assembling stoves, ovens and barbecues. Excellent adhesion to most porous building materials and metals

TECHNICAL DATA

Base	**Sodium silicate**
Form	**Paste**
Colour	**Black**
Application temperature	**+5°C to +35°C**
Density	**1.90 ± 0.05 g/cm³ ASTM D1875**
Temperature resistance	**-30°C to +1500°C**

PACKAGING

COLOUR	SIZE	PER BOX
Black	**100 ml**	**36 pcs**



ANCHORS

Chemical Anchors

Injection mortars for heavy-duty anchoring in solid and hollow substrates.

CHEMICAL ANCHORS

EPOXY BASED CHEMICAL ANCHOR



PROPERTIES

Epoxy Based Chemical Anchor is a high performance vinyl ester based injection mortar for solid and hollow substrates with short curing times. Suitable for use on concrete, stone, hollow brick and hollow blocks in a wide range of applications.

APPLICATIONS

- Anchoring of heavy loads on stone and concrete.
- Repair of mortars and adhesive mortars on concrete components.
- Anchoring of bars, threaded collars, reinforcement bars, profiles etc.
- Medium load applications in hollow bricks.
- Fixing of wooden constructions, metal constructions, metal profiles, sanitary accessories, pipe connections, overhanging roofs, facades, walkways, cable trays, railings, stairs, doors, window frames.

TECHNICAL DATA

Base	**Epoxy**
Colour	**Light grey / beige (component A); dark grey (component B)**
Density	**1.65 ± 0.03 (component A); 1.3 ± 0.03 (component B)**
Complete curing	**7 days**
Application temperature	**+5°C to +35°C**
Temperature resistance	**-30°C to +100°C**

PACKAGING

SIZE	PER BOX
300 ml	**12 pcs**

CHEMICAL ANCHORS

POLYESTER BASED CHEMICAL ANCHOR



PROPERTIES

Polyester Based Chemical Anchor is a general purpose polyester based injection resin for solid and hollow substrates with short curing times. Suitable for use in concrete, hollow brick and hollow concrete blocks.

APPLICATIONS

- Anchoring of heavy loads on stone and concrete. Threaded collars, anchoring or reinforcement of bars, profiles.
- Repair of mortars and adhesive mortars on concrete components.
- Medium load applications in hollow bricks.
- Fixing of wooden constructions, metal constructions, metal profiles, sanitary accessories, pipe connections, overhanging roofs, facades, walkways, cable trays, railings, stairs, doors, window frames.

TECHNICAL DATA

Base	**Polyester**
Colour	**Light grey / beige (component A); dark grey (component B)**
Density	**1.66 ± 0.03 (component A); 1.3 ± 0.03 (component B)**
Complete curing	**7 days**
Application temperature	**+5°C to +35°C**
Temperature resistance	**-30°C to +100°C**

PACKAGING

SIZE	PER BOX
300 ml	**12 pcs**



SPRAYS

Technical Sprays

Maintenance, cleaning and workshop sprays.

TECHNICAL SPRAYS

BRAKE CLEANER



PROPERTIES

Brake spray cleans dust, grease on all the brake parts in an efficient way. Cleans the dust on disc and drum With its efficient formula it cleans without disassembling the brake unit It helps to decrease voice causing from brake parts Dries immediately

- Cleans deeply
- Can be applicable 360° It is not corrosive
- Leaves no chemical residue

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

TECHNICAL SPRAYS

RUST REMOVER



PROPERTIES

Spray Rust Remover is a non-silicone protective spray, effective lubricant, anti-rust. Thanks to its special formulation it is easily applied and penetrates into surfaces. Loosens rusted parts and provides a protective layer between metal surfaces. Decreases friction. Avoid friction-motivated squeaking and corrosion. Removes water and protects against moisture. Protects metal parts and surfaces from corrosion. Cleans dust/grease and adhesive particles on metal surfaces. With its non-silicone formulation, there will be no dirt on the surfaces.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear liquid, slightly cloudy**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
400 ml	**12 pcs**

TECHNICAL SPRAYS

RUST REMOVER PRO



PROPERTIES

Multipurpose Lubricant is a lubricating, protective, cleaning and loosening product for general maintenance applications. Lubricates, protects, removes dirt and grease, cleans, loosens rusty / oxidized parts and is hydrophobic. Non-silicone formulation. Removes rust and can be used in all positions

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Characteristic**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
200 ml	**36 pcs**
400 ml	**24 pcs**

TECHNICAL SPRAYS

SILICONE SPRAY



PROPERTIES


It is an aerosol spray based on transparent, lubricating and high quality silicone oil. Lubricates, reduces friction and wear, prevents rust and oxidation, is hydrophobic, provides effective insulation.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear liquid, slightly cloudy**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

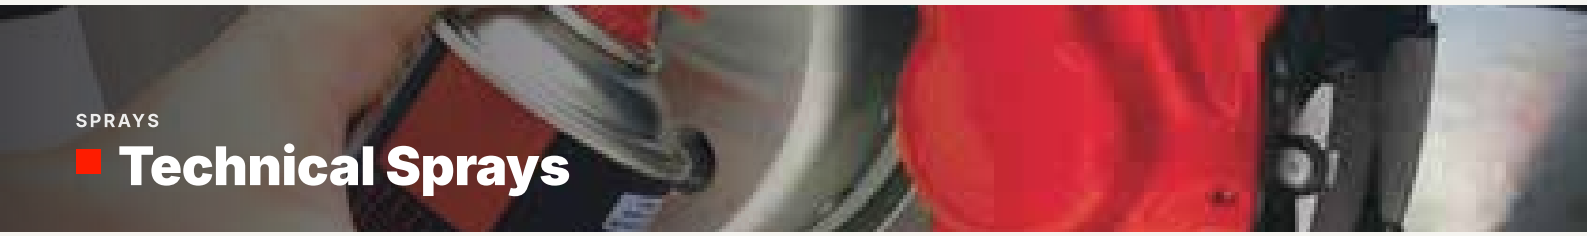

SPRAYS

Technical Sprays

TECHNICAL SPRAYS

ZINC SPRAY



PROPERTIES

Permanently protects metal surfaces affected by cathodic corrosion. It offers fast drying and high adhesion capacity and with its special formulation, provides long-term protection. Good resistance to mechanical shocks. High quality technical spray. Economical and reliable. Adheres to a wide variety of metal surfaces. Quick drying.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Yellowish**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
400 ml	**12 pcs**

TECHNICAL SPRAYS

LIQUID GREASE SPRAY



PROPERTIES

Liquid Grease Spray is a lubricating paste in spray form that helps reduce friction between metal and/or metal and plastic surfaces. Lubricates, reduces friction and wear, prevents rust and oxidation, hydrophobic, silicone-free formulation, can be applied in all directions (360°), thanks to its special formulation, it is easily applied and penetrates surfaces.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear liquid, slightly cloudy**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

TECHNICAL SPRAYS

GASKET CLEANER



PROPERTIES

Gasket is a general purpose cleaning spray to remove gas kets and gasket residue from any type of metal or plastic surfa ce.

- Removes gaskets from aluminum easily
- Cleans deeply
- It is not corrosive
- Leaves no chemical residue
- Removes gaskets from small, difficult to reach areas

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

TECHNICAL SPRAYS

ENGINE CLEANER



PROPERTIES

Engine Cleaner, has a unique cleaning efficiency with its solvent containing non-foaming formulation. It dissolves grease, oil and dirt on all types of engines.


- With its special formulation, it can be easily applied and penetrates in to the surfaces.
- Makes equipment run smoother and last longer.
- Cleans the dust/ grease and dirt on the engine surfaces.
- With its non-foaming formulation , there won't be dirt on the surfaces.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

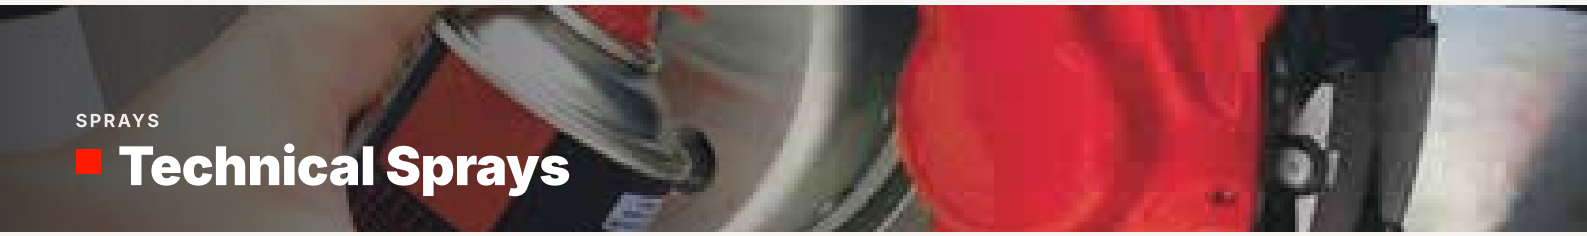

SPRAYS

Technical Sprays

TECHNICAL SPRAYS

SEAT BELT LUBRICANT CLEANER



PROPERTIES

Seat Belt spray is a special product with its lubricating effect increase the lifetime of the seat belts and provides easy usage.

- With its efficient formula it cleans deeply
- It is not corrosive
- Leaves no chemical residue
- Prevents the hardening of the seat belt

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
200 ml	**36 pcs**

TECHNICAL SPRAYS

MAG WELDING SPRAY SILICONE FREE



PROPERTIES

Weld, is a special spray, avoids adherence of spatter to metal surfaces during welding and eliminates the need for chiselling, grinding or wire brushing after welding. Suitable for protecting nozzles, weld units and tools intended for arc-welding processes.

- Easy removal of welding spatter.
- It is not corrosive, protects from oxidation.
- Extended nozzle life, weld units and tools.
- Easy application.
- Very fast drying and non-flammable.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

TECHNICAL SPRAYS

ETHER CAR STARTER



PROPERTIES

Ether Car Starter Spray is a special product helps to start engine during cold season times.

- Suitable for all engine types.
- It is not corrosive.
- Leaves no chemical residue.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
200 ml	**36 pcs**

TECHNICAL SPRAYS

MOLD RELEASE



PROPERTIES

Mold MR Silicon Mold Release spray is a special product with high temperature resistance (+300°C) that prevents adhesion of the plastic or rubber raw material to the mold by forming a strong film layer on plastic injection machines.


- Forms a heat-resistant homogenous film layer on the surface, enabling molding several times.
- Resistant to high temperature up to +300°C.
- Leaves no stain on the product.
- Can be used for the manufacturing of parts from natural rubber, synthetic rubber, nitrile, neoprene, PP, HDPE, LDPE, PVC, etc. Can be used as an anti-adhesion agent in Paper and Textile manufacturing. Do not use for processes subject to post-dyeing. No disturbing odor.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
400 ml	**12 pcs**

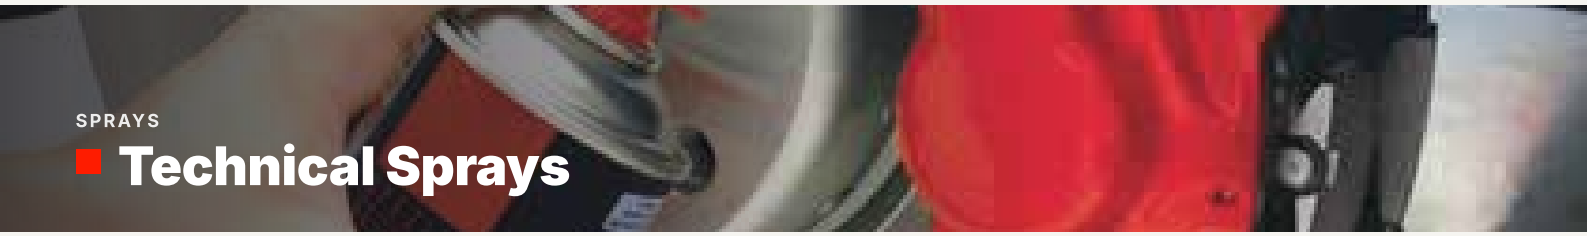

SPRAYS

Technical Sprays

TECHNICAL SPRAYS

CARBURETTOR CLEANER



PROPERTIES

Carburator Cleaner, has a unique cleaning efficiency with its solvent containing non-foaming formulation. It dissolves grease, oil and dirt on all types of engines.

- With its special formulation, it can be easily applied and penetrates in to the surfaces.
- Makes equipment run smoother and last longer.
- Cleans the dust/ grease and dirt on the engine surfaces.
- With its non-foaming formulation, there won't be dirt on the surfaces.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
200 ml	**36 pcs**

TECHNICAL SPRAYS

AIR CONDITIONING CLEANER



PROPERTIES

Air Conditioner Cleaning Spray cleans odours and deposits in the air conditioner system and environment. It ensures durable protection thanks to its special formula.

- Removes odours caused by the air conditioner.
- Removes tobacco smoke inside the car.
- No extra apparatuses and devices needed for application.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX	CODE
150 ml	**36 pcs**	**0025700**

TECHNICAL SPRAYS

BELT DRESSING



PROPERTIES

Belt is general purpose cleaning spray to extend belt life, prevent belt slippage.

- Avoids dirt and grime
- Hydrophoblc
- Cleans deeply
- It is not corrosive
- Leaves no chemical residue
- Extends belt life and pulley bearing life

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

TECHNICAL SPRAYS

CONTACT CLEANER



PROPERTIES

Contact Cleaner is a general purpose cleaning spray for electrical contact applications.


- Avoids rust and corrosion
- Hydrophobic
- Dries immediately
- Cleans deeply
- Can be applicable 360 0
- It is not corrosive
- Leaves no chemical residue.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX	CODE
500 ml	**12 pcs**	**0025600**

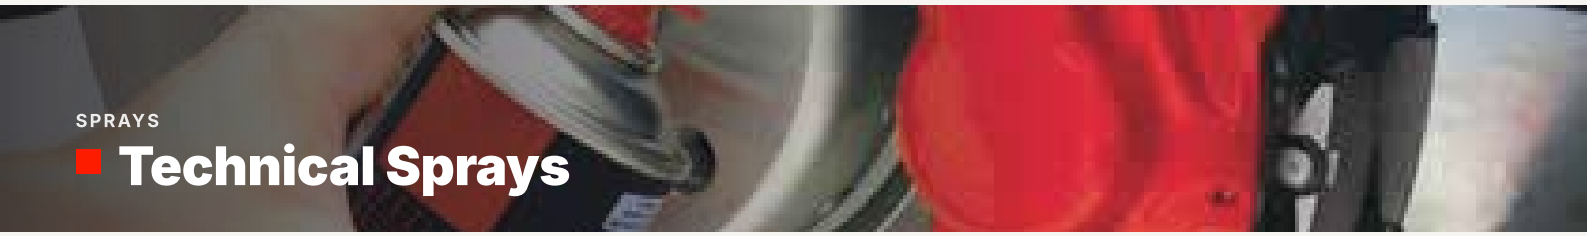

SPRAYS

Technical Sprays

TECHNICAL SPRAYS

RUBBER SEALS RENOVATION



PROPERTIES

Rubber Seals Renovation Spray cleans dust, grease on all the rubber part, provides easy application and long lifetime.

- Decrease the voice coming from vehicle rubber part.
- Suitable all weather conditions, avoids adhesion of rubber parts on to the doors.
- Water resistant.
- Cleans deeply, It is not corrosive.
- Leaves no chemical residue.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX	CODE
200 ml	**36 pcs**	**0005300**

TECHNICAL SPRAYS

TAR & PITCH CLEANER



PROPERTIES

Tar, is a general purpose cleaning spray for removing dirt/! grease from forming on your vehicle (doors, bumpers etc...)

- Avoids dirt on the body part of vehicle
- Cleans deeply
- It is not corrosive, protects from oxidation
- Easy application

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
—	**12 pcs**

TECHNICAL SPRAYS

COCKPIT SHINER



PROPERTIES

Cockpit spray cleans dust, grease on the car interiors (dashboard, cleans deeply

- Dries immediately and invisible
- It is not corrosive
- Leaves no chemical residue
- Cleans and shines for a like-new plastic trim and leather part.) -Cleans the dust on different plastic parts
- With its efficient formula it appearance

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
400 ml	**12 pcs**

TECHNICAL SPRAYS

WELDING SPRAY



PROPERTIES

Silicon Weld, is a special spray, avoids adherence of spatter to metal surfaces during welding and eliminates the need for chiselling, grinding or wire brushing after welding. Suitable for protecting nozzles, weld units and tools intended for arc-welding processes.


- Easy removal of welding spatter.
- It is not corrosive, protects from oxidation.
- Extended nozzle life, weld units and tools.
- Easy application.
- Very fast drying and non-flammable.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
400 ml	**12 pcs**

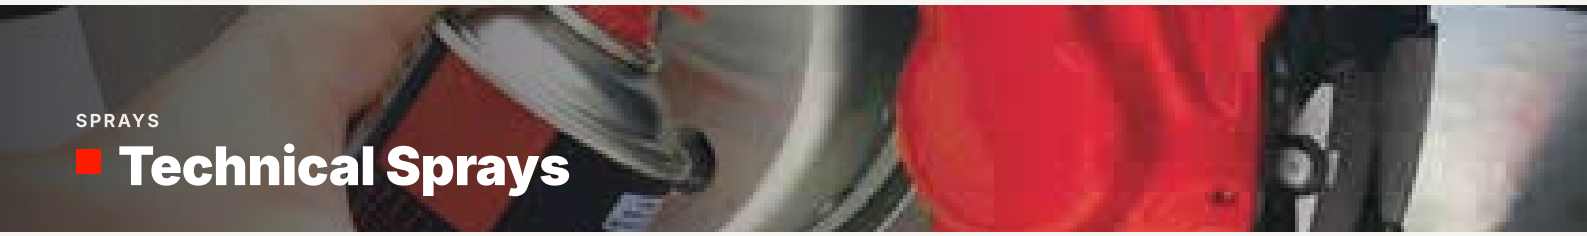

SPRAYS

Technical Sprays

TECHNICAL SPRAYS

MOLD RELEASE SILICONE FREE



PROPERTIES

Mold Releaser is a special spray, used in mold making and casting, and works well with most liquid rubber and liquid plastic products. It will release mold rubbers (such as polyurethanes and polysulfides) from properly prepared models.

- Drying fast.
- Anti-Stick.
- Suitable in hot and cold molds.
- Colorless, odorless.
- Leaves no chemical residue.
- Silicone free.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

TECHNICAL SPRAYS

ELECTRONIC BOARD CLEANER



PROPERTIES

Electronic Board Cleaner is a clear spray protects circuits and electrical devices from moisture and chemicals.

- Easy application with its special design.
- With its special formulation, it provides fast drying.
- Resistance to moisture and chemicals.
- Resistant to chemicals
- With its non-siliconized formulation, there won't be dirt on the surfaces

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

TECHNICAL SPRAYS

MOLD CLEANER



PROPERTIES

Mold is a special cleaning spray to remove dirt and grease from engine blocks and composite molds.

- Removes residues (dust, grease, moisture.. etc) from surfaces easily and efficiently.
- It is not corrosive.
- Leaves no chemical residue.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

TECHNICAL SPRAYS

LABEL REMOVER SPRAY



PROPERTIES

Label Remover has a special formulation for the quick and efficient removal of paper based pressure sensitive adhesive labels on different types of surfaces


- With its efficient formulation it cleans without leaving adhesive residue or scratching surface.
- Cleans deeply.
- It is not corrosive.
- Harmless to most surfaces.
- Does not contain CFC, halogenated solvent.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**

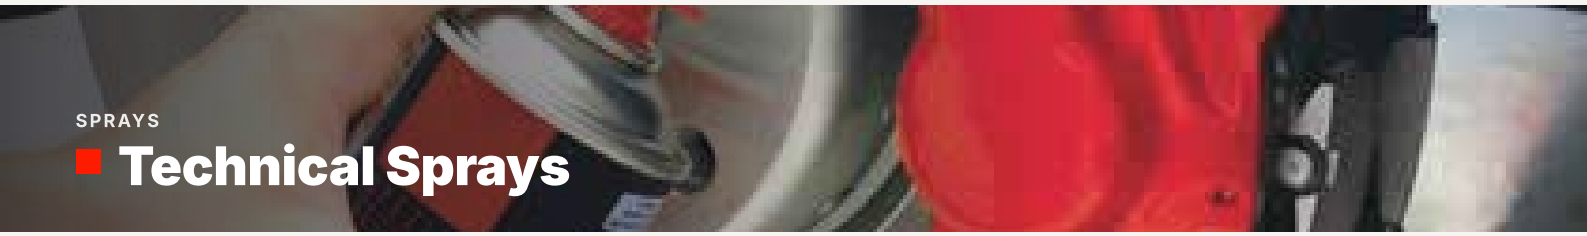

SPRAYS

Technical Sprays

TECHNICAL SPRAYS

TYRE SHINER



PROPERTIES

Tyre Shiner is a general purpose cleaning spray for removing dirt/ grease from forming on tyres.

- Avoids dirt on the rubber tyre part.
- Cleans deeply, provides shiny appearance.
- It is not corrosive, protects from oxidation.
- Extends tyre life.
- Easy application.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

SIZE	PER BOX
500 ml	**12 pcs**



The FloorLaBs chemicals range: sealants, foams, adhesives and sprays.

SPRAYS

Spray Paint

Acrylic spray paint in 41 colours.

SPRAY PAINT

RAINBOW COLORS SPRAY PAINT



PROPERTIES

Rainbow Colors is an acrylic and solvent based spray paint, specially developed to meet the needs of interior and exterior decoration for decoration and protection purposes. With its special formulation can be used in wood, metal, plastic, concrete, paper, glass and cardboard surfaces.

TECHNICAL DATA

Form	**Aerosol**
Appearance	**Clear**
Odor	**Characteristic**

PACKAGING

COLOUR	SIZE	PER BOX
RAL 9004	400 ml	12 pcs
RAL 8003	400 ml	12 pcs
RAL 8016	400 ml	12 pcs

COLOUR CHART

BLACK MAT
RAL 9005
TAB-428

BLACK GLOSSY
RAL 9005
TAB-429

LINER PAINT BLACK
RAL 9005
TAB-434

ANTHRACITE GREY
RAL 7016
TAB-451

ULTRAMARINE BLUE
RAL 5002
TAB-421

GENTIAN BLUE
RAL 5010
TAB-443

TRAFFIC BLUE
RAL 5017
TAB-420

SKY BLUE
RAL 5015
TAB-448

LIGHT BLUE
RAL 5012
TAB-422

MOSS GREEN
RAL 6005
TAB-412

LEAF GREEN
RAL 6002
TAB-413

GRASS GREEN
RAL 6010
TAB-414

GREEN
RAL 6018
TAB-415

SULPHUR YELLOW
RAL 1016
TAB-447

TRAFFIC YELLOW
RAL 1023
TAB-409

MELON YELLOW
RAL 1028
TAB-410

ORANGE
RAL 2004
TAB-408

SIGNAL ORANGE
RAL 2010
TAB-444

VERMILION ORANGE
RAL 2002
TAB-416

TRAFFIC RED
RAL 3020
TAB-419

FLAME RED
RAL 3000
TAB-418

CARMINE RED
RAL 3002
TAB-417

WINE RED
RAL 3005
TAB-401

CHOCOLATE BROWN
RAL 8017
TAB-450

PEARL COPPER
RAL 8029
TAB-453

PEARL GOLD
RAL 1036
TAB-452

CONCRETE GREY
RAL 7023
TAB-445

SILVER GREY
RAL 7001
TAB-423

200°C GREY HOT
RAL 9006
TAB-433

WINDOW GREY
RAL 7040
TAB-449

GREY ALUMINIUM
RAL 9007
TAB-427

ALUMINIUM WHITE
RAL 9006
TAB-424

PEBBLE GREY
RAL 7032
TAB-426

LIGHT GREY
RAL 7035
TAB-425

GREY WHITE
RAL 9002
TAB-446

OYSTER WHITE
RAL 1013
TAB-403

LIGHT IVORY
RAL 1015
TAB-411

PURE WHITE MAT
RAL 9010
TAB-402

PURE WHITE GLOSSY
RAL 9010
TAB-405

TRAFFIC WHITE
RAL 9016
TAB-404

WHITE
RAL 9003
TAB-407

Printed colours are a guide only. Colour name, RAL reference and product code as supplied.

FloorLaBs

One Step Ahead

SEALANTS · FOAMS · ADHESIVES · ANCHORS · SPRAYS

www.floorlabs.co

www.floorlabs.nl