

FloorLaBs

One Step Ahead

UNDERLAYS, SKIRTING & PROFILES

Installation Systems Catalogue 2026

FOAM · XPS · CORK · UNDERFLOOR HEATING · MDF SKIRTING · ALUMINIUM PROFILES · FITTING TOOLS

floorlabs.co · floorlabs.nl

EVERYTHING UNDER & AROUND THE FLOOR

The products that turn a floor into a finished room: underlays that insulate against noise, damp and heat, MDF skirting boards to match our laminate collections, aluminium transition and stair profiles, and the fitting tools installers use every day.

10	14	15	4
Underlays & accessories	Skirting models	Aluminium profiles	Fitting tools

UNDERLAYS

Foam underlays · F102	**04**
XPS underlays · F203 · F222	**05–06**
Metalized · Cork · Underheating	**06–07**
Cork & rubber · Seam tape	**08**
Underlay selection guide	**09**

SKIRTING BOARDS

MDF skirting introduction	**10**
Skirting models	**11–12**

PROFILES & TOOLS

Thresholds & stair profiles	**13–15**
Fitting tools	**16**







SECTION 01

UNDERLAYS & INSULATION

A good underlay makes a floor quieter, warmer and longer-lasting. Our range covers every subfloor and budget: foam rolls, rigid and folding XPS boards, natural cork, foil-faced vapour barriers and a dedicated underlay for underfloor heating.

Quieter rooms

Absorbs footfall and impact noise, up to 23 dB.

Damp protection

Foil-faced and closed-cell types keep moisture away from the floor.

Heat insulation

Keeps warmth in the room and helps save energy.

Longer floor life

Evens out the subfloor and protects the locking joints.

For Laminate · Engineered parquet · Solid wood · Floating screeds · Underfloor heating



F102

WHITE FOAM UNDERLAY

Foam roll underlay for floating floors and screeds

An all-round foam underlay for laminate and engineered floors. It evens out the subfloor, protects the floor against temporary loads and reduces walking noise. It can also be laid loose under a screed: turn it up to skirting height along the walls so the screed never touches the wall. A floating screed of about 5 cm on top gives the best sound absorption.

Thickness	**1 · 2 · 3 · 5 mm**
Roll size	**25 m × 1 m**
Per roll	**25 m²**
Colour	**White**
Underfloor heating	**Suitable**
Stock codes	**F102 1MM … F102 5MM**

- Insulates against impact noise, damp and heat
- Flexible, crush-resistant and quick to lay
- Resistant to bacteria, fungus and rot





F102 G

GREY FOAM UNDERLAY

Grey foam roll underlay

The grey version of our foam underlay, with the same uses: under floating laminate and engineered floors, or laid loose under a screed with the edges turned up along the walls. It smooths small subfloor defects and softens footfall noise.

Thickness	**1 · 2 · 3 · 5 mm**
Roll length	**25 m**
Per roll	**25 m²**
Colour	**Grey**
Underfloor heating	**Suitable**
Stock codes	**F102 1MM G … F102 5MM G**

- Insulates against impact noise, damp and heat
- Flexible, crush-resistant and quick to lay
- Resistant to bacteria, fungus and rot





F203

STYROFOAM XPS


Rigid XPS boards for floating parquet

Extruded polystyrene boards made for floating floors. Lay them loose across the direction of the floorboards: no glue or tape is needed. The boards cover cracks and small unevenness to give a straight, durable base, and their thickness leaves room to run cables under the floor.

Thickness	**3 · 5 · 8 mm**
Board size	**1250 × 800 mm**
Per pack	**50 m²**
Impact sound	**Up to 23 dB**
Moisture	**Water and moisture resistant**
Underfloor heating	**Not suitable**

- No glue or tape needed
- Excellent heat insulation
- Levels cracks and small unevenness
- Room for cables under the floor



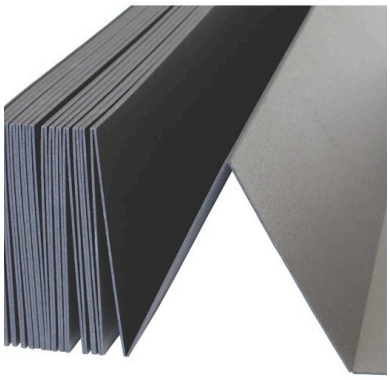

F222

FOLD XPS

5 mm zig-zag folding XPS underlay

XPS underlay with a zig-zag surface that folds out quickly across the room. The structure soaks up footfall noise, gives real heat insulation and helps extend the life of the floor above. It does not harbour bacteria.

Thickness	**5 mm**
Surface	**Zig-zag profile**
Format	**Folding panels**
Use	**Laminate and parquet**

- Absorbs impact sound
- Real heat insulation
- Extends floor life
- Does not harbour bacteria





F222 A

FOLD XPS ALU

Fold XPS with aluminium foil facing

Our Fold XPS with an aluminium foil face for extra protection against damp and better heat reflection. The 5 mm zig-zag core absorbs impact sound, and the board is made to withstand loads of up to 8 t/m².

Thickness	**5 mm**
Surface	**Zig-zag, aluminium foil**
Load resistance	**Up to 8 t/m²**
Use	**Laminate and parquet**

- Aluminium foil facing
- Absorbs impact sound
- Real heat insulation
- Does not harbour bacteria



F302

METALIZED UNDERLAY

Foam underlay with metallised vapour barrier

Foam underlay with a metallised film that protects laminate and engineered floors against damp rising from the subfloor. It is the recommended choice on screed floors and lasts longer than standard foam underlays. Lay it with the metallised side facing down.

Thickness	**1 · 2 · 3 · 5 mm**
Roll length	**25 m**
Per roll	**25 m²**
Facing	**Metallised film**
Underfloor heating	**Suitable**
Laying	**Metallised side down**

- Damp and moisture protection
- Reduces subfloor noise
- Gives the floor flexibility and durability





F402

CORK UNDERLAY

Natural cork underlay

A fully natural underlay for laminate, engineered and solid wood floors. Cork gives both sound and heat insulation and conducts heat well, so it can be used over underfloor heating.

Thickness	**1.7 mm (stock)**
Also made in	**2 · 3 · 5 mm**
Per roll	**10 m²**
Format	**Rolls or sheets**
Underfloor heating	**Suitable**
Stock code	**F402 1.7MM**

- 100% natural material
- Sound and heat insulation
- For laminate, engineered and solid wood





F501

UNDERHEATING UNDERLAY

For underfloor heating and cooling systems

Made for floors over underfloor heating and cooling. It passes heat up to the floor easily, while the metallised face reflects heat back into the room. The closed-cell structure does not take up water, protects the floor against damp and stops impact noise travelling to the room below.

Thickness	**1 · 2 · 3 · 5 mm**
Roll length	**25 m**
Per roll	**25 m²**
Density	**25–30 kg/m³**
Sound absorption	**20–23 dB**
Colour	**Orange, metallised face**

- Closed cells, no water uptake
- Smooths screed defects
- Reduces impact noise between floors





F627

CORK & RUBBER UNDERLAY

Cork and rubber granulate underlay

Cork granules bound with rubber, for a dense and resilient underlay. Ask our sales team for thickness and roll sizes.

Material	**Cork + rubber**
Format	**Roll**
Sizes	**On request**



F315

ALUMINIUM SEAM TAPE

For joining foil-faced underlays

Aluminium tape for sealing the seams of metallised and foil-faced underlays, so the vapour barrier stays closed across the whole floor.

Material	**Aluminium foil**
Use	**F302 · F501 · F222 A seams**
Sizes	**On request**

WHICH UNDERLAY FOR WHICH FLOOR?

Underlay	Thickness mm	Format	Impact sound	Underfloor heating	Best for
F102 White Foam	1 · 2 · 3 · 5	Roll 25 m²	–	✓	Everyday laminate, under screeds
F102 Grey Foam	1 · 2 · 3 · 5	Roll 25 m²	–	✓	Everyday laminate, under screeds
F203 Styrofoam XPS	3 · 5 · 8	Boards 50 m²	≤ 23 dB	✗	Uneven subfloors, cables under floor
F222 Fold XPS	5	Folding panels	–	–	Fast laying, sound absorption
F222 A Fold XPS Alu	5	Folding panels	–	–	Damp subfloors, high loads (8 t/m²)
F302 Metalized	1 · 2 · 3 · 5	Roll 25 m²	–	✓	Screed floors, damp protection
F402 Cork	1.7 (2 · 3 · 5)	Roll 10 m²	–	✓	Natural material, all wood floors
F501 Underheating	1 · 2 · 3 · 5	Roll 25 m²	20–23 dB	✓	Underfloor heating and cooling

– = no value given yet. Ask our sales team for full technical data sheets.

Laying underlays

1. **Prepare**
   The subfloor must be clean, dry and level. Remove loose material and fill large holes.
2. **Lay loose**
   Roll out or lay the underlay loose, across the direction of the floorboards. XPS boards need no glue or tape.
3. **Butt the joints**
   Place strips edge to edge without overlap. Seal foil-faced types with aluminium seam tape F315.
4. **Mind the side**
   Lay F302 Metalized with the metallised side facing down.
5. **Under a screed**
   Turn foam underlay up the walls to skirting height so the screed does not touch the wall. About 5 cm of floating screed gives the best sound absorption.
6. **Install the floor**
   Lay the floor straight away and finish the edges with matching FloorLaBs skirting.

Tip Over underfloor heating, choose F501 Underheating, F102, F302 or F402 Cork. F203 Styrofoam XPS is not suitable over underfloor heating.



SECTION 02

MDF SKIRTING BOARDS

Decor-matching MDF skirting for every FloorLaBs laminate floor, in classic and modern profiles. Boards are made from first-class MDF and wrapped in a white lacquer-look PVC decor foil that will not deform. Decor foils to match our laminate collections are available on request.

2.8 m Board length	**10–16** Thickness, mm
4–15 Height, cm	**100+** Decor foil colours

- Works with laminate, engineered, solid wood, carpet and stone floors
- White lacquer-look finish goes with any floor colour
- Easy installation; Florida uses a hidden clip system
- Matching corners and edgings available





MDF SKIRTING

COLORADO

Classic double wave
Height: **120 mm**
Thickness: **14 mm**
Pack: **8 pcs · 22.4 m**
Stock: **COLORADO 0812**



MDF SKIRTING

BOSTON

Top bead, flat face
Thickness: **14 · 16 mm**
Stock: **BOSTON 0812 · 0814 · 1014 · 1214 · 1514**



MDF SKIRTING

UTAH

Stepped ogee top
Height: **98 mm**
Thickness: **10 · 12 · 14 · 16 mm**
Pack: **14 pcs · 39.2 m**



MDF SKIRTING

INDIANA

Round bead, stepped base
Thickness: **14 · 16 mm**
Stock: **INDIANA 0812**



MDF SKIRTING

OKLAHOMA

Deep wave top
Thickness: **12 · 14 mm**



MDF SKIRTING

TEXAS

Square, minimal
Thickness: **10 · 12 · 14 · 16 mm**
Stock: **TEXAS 0812 · 0814 · 1012 · 1014 · 1212 · 1214**



MDF SKIRTING

NEW YORK

Rounded top edge
Thickness: **10 · 12 · 14 · 16 mm**
Stock: **NEW YORK 0812 · 0814 · 1012 · 1214**




MDF SKIRTING

ATLANTA

Square, flat face
Thickness: **10 · 12 · 14 · 16 mm**



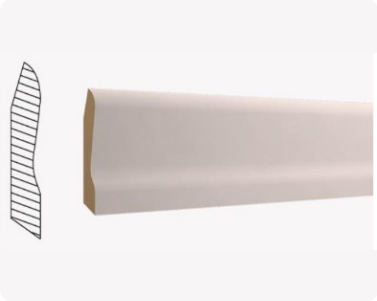

MDF SKIRTING

DENVER


Soft S-curve
Height: **78 mm**
Thickness: **10 · 14 mm**
Pack: **12 pcs · 33.6 m**
Stock: **DENVER 0810**



MDF SKIRTING

DENVER 60


Soft S-curve, low
Height: **58 mm**
Thickness: **10 · 12 mm**
Pack: **26 pcs · 72.8 m**

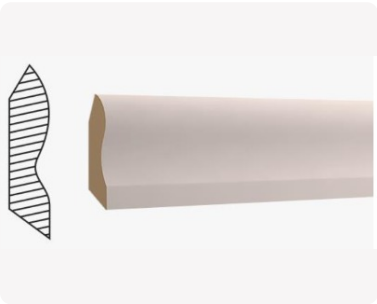

MDF SKIRTING

DENVER 40


Soft S-curve, extra low
Height: **41.5 mm**
Thickness: **10 · 12 mm**
Pack: **36 pcs · 100.8 m**

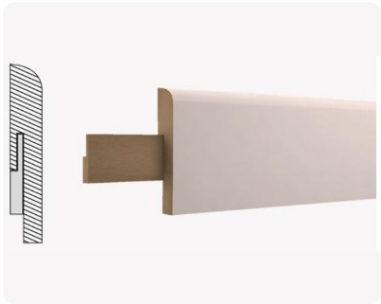

MDF SKIRTING

FLORIDA


Clip-on system, rounded top
Thickness: **14 · 16 mm**
Fixing: **Clips, no visible nails**
Stock: **FLORIDA 0814 · 1014 · 1214**

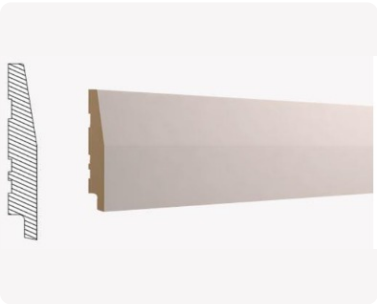

MDF SKIRTING

DALLAS

Bevelled top
Thickness: **12 · 14 · 16 mm**

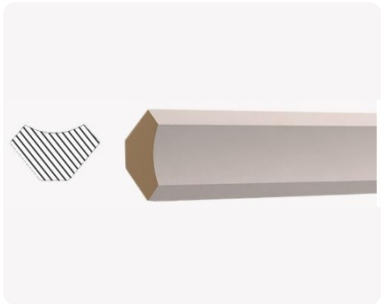

MDF SKIRTING

BEVEL BEAD 25

Bevelled cover bead
Size: **25 × 12 mm**
Pack: **65 pcs · 182 m**

How to read stock codes The four digits give height in cm and thickness in mm: TEXAS 1012 = 10 cm high, 12 mm thick. Every model is 2.8 m long. Other height and thickness combinations are made to order.



SECTION 03

ALUMINIUM PROFILES

Thresholds, level-change, stair and edge profiles to finish every transition. Aluminium profiles come in silver and gold anodised finishes.



Clip-Fit Threshold Profile

Curved aluminium threshold that clips over the joint between two floors of the same height.

Widths	**38 · 40 · 50 mm**
Length	**270 cm**



Decor Covered Threshold Profile

Screw-fixed threshold with a wood-effect covering that blends with the floor.

Sizes	**8×30 · 8×40 · 10×40 · 12×40 mm**
Length	**270 cm**
Pack	**50 pcs**



Hidden-Screw Threshold Profile

The fixing screw sits under the profile, giving a clean finish at doorways.

Widths	**30 · 40 · 60 mm**
Length	**270 cm**
Pack	**50 pcs**



Eco Flat Threshold Profile

Slim, low-profile aluminium cover strip for flat transitions.


Width	**40 mm**
Length	**270 cm**
Pack	**50 pcs**



Deluxe Stair Nosing, Rubber Insert

Stair nosing with a ribbed rubber insert for safe, anti-slip steps.


Size	**41 mm**
Length	**270–300 cm**
Pack	**50 pcs**

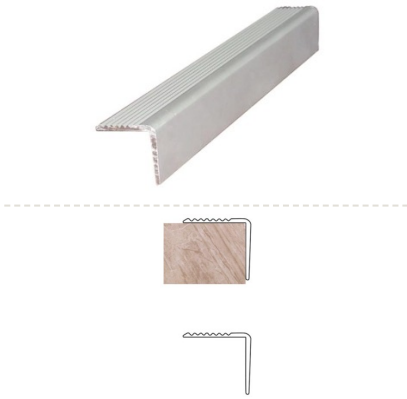


Stair Nosing Profile

Grooved aluminium angle that protects and finishes the step edge.

Size	**25 mm**
Length	**270–300 cm**
Pack	**50 pcs**

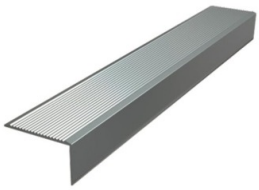





Stair Step Profile

Ribbed aluminium step edge for laminate and parquet stairs.

Size	**22 mm**
Length	**270–300 cm**
Pack	**On request**







Anti-Slip Step Profile, Rubber Insert

Tile-in step profile with a rubber anti-slip insert.

Size	**11 mm**
Length	**250–270 cm**
Pack	**50 pcs**









Round Edge Trim (C Profile)

Rounded tile-in edge trim for corners and step edges.

Size	**10 mm**
Length	**250–270 cm**
Pack	**50 pcs**








Anodised Bevel Profile

Hollow anodised aluminium ramp profile for small edges.

Size	**7 mm**
Length	**300 cm**
Pack	**50 pcs**








Ribbed Threshold Profile

Anti-slip ribbed threshold for heavy-traffic doorways.

Width	**40 mm**
Length	**270 cm**
Pack	**50 pcs**







Z Profile (Level Change)

Bridges a step in height between two floor coverings.

Sizes	**8×30 · 8×40 · 10×40 · 12×40 mm**
Length	**270 cm**
Pack	**50 pcs**






Pressure Strip, Single / Double

Flat aluminium strip that holds down carpet and floor edges.

Size	**11 mm**
Length	**250 cm**
Pack	**50 pcs**





T Profile

Covers expansion joints between two floors at the same level.

Widths	**15 · 20 · 25 · 30 mm**
Length	**On request**





Stainless Steel Mirror Border

Polished stainless steel U-border for decorative inlays and edges.

Widths	**15 · 23 · 30 mm**
Length	**244 cm**
Pack	**50 pcs**

Finishes Aluminium profiles are supplied in silver and gold. The decor covered threshold has a wood-effect surface. The mirror border is stainless steel.

Choosing a profile Same floor height: threshold or T profile. Different heights: Z profile. Stairs: stair nosing or step profile. Tile edges: C profile or anti-slip step profile.

SECTION 04

FITTING TOOLS

The everyday tools for a clean, fast floor installation.



TAPPING BLOCK

Your easiest installation partner for laminate, engineered and solid parquet. Taps boards together without damaging the locking edge.

Material	**Plastic**
Use	**Laminate · Parquet**



PULL BAR

Steel pull bar for closing the last row of boards against the wall, where a tapping block will not fit.


Material	**Steel**
Use	**Laminate · Parquet**



BRAD NAILS

Fast, neat fixing of skirting boards and wood panelling. Also for wood, parquet, laminate, MDF and bamboo work, and for holding parts while adhesive sets.

Use	**Skirting · Panelling · Joinery**

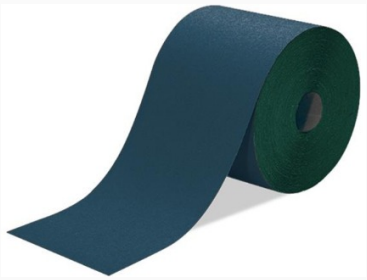

ABRASIVE ROLL

Cloth-backed zirconia alumina abrasive for sanding parquet, wood, leather, plastic and metal. Open coat, resin-over-resin bond for strength.

Size	**50 m × 200 mm**
Grits	**24 · 36 · 40 · 60 · 80**
Backing	**Cotton cloth**

More tools Cutters, spacers, trowels and cleaning products are in our Flooring Adhesives & Accessories catalogue.

FloorLaBs

One Step Ahead

UNDERLAYS · SKIRTING · PROFILES · LAMINATE · SPC · WALL PANELS · SEALANTS & ADHESIVES

www.floorlabs.co
www.floorlabs.nl