

FloorLaBs

One Step Ahead

FLOORING ADHESIVES & ACCESSORIES

Product Catalogue 2026

SEALANTS · FOAMS · FLOOR ADHESIVES · PRIMERS · FLOOR PAINTS · ALUMINIUM PROFILES · TOOLS · CLEANING · SAFETY

EVERYTHING UNDER THE FLOOR

Adhesives, primers, sealants, profiles and tools for laminate, SPC, parquet, vinyl and carpet installations, all under the FloorLaBs name.

46	16	19	11
Products	Chemicals	Profiles	Tools

THE ADHESIVE COLLECTION



MDF Kit 2C Rapid Adhesive



Parquet Adhesive 2C PU



Multi-Purpose Silicone



One-Component PU Concrete Primer



PU Montage Foam



PVC & Vinyl Adhesive



Siliconized Acrylic Sealant



Water-Based Acrylic Primer

CONTENTS

SEALANTS & FOAMS

Silicone · Acrylic Sealant 03

PU Foam · Rapid Adhesive · Silicone Gun 04

FLOOR ADHESIVES & PRIMERS

Parquet · PVC & Vinyl Adhesives 05

Carpet Tile Tackifier · Acrylic Primer 06

PU Primer · Moisture Barrier 07

FLOOR PAINTS

PU Floor Paint · Epoxy Floor Paint 08

ALUMINIUM PROFILES

Profile overview 09

Transition profiles 10

Level & Z profiles 11

Stair nosing · End profiles 12


Angle bars · T profiles 13

TOOLS & ACCESSORIES

Cutting machines 14

Spreaders · Installation tools 15

Cleaning kit · Safety equipment 16

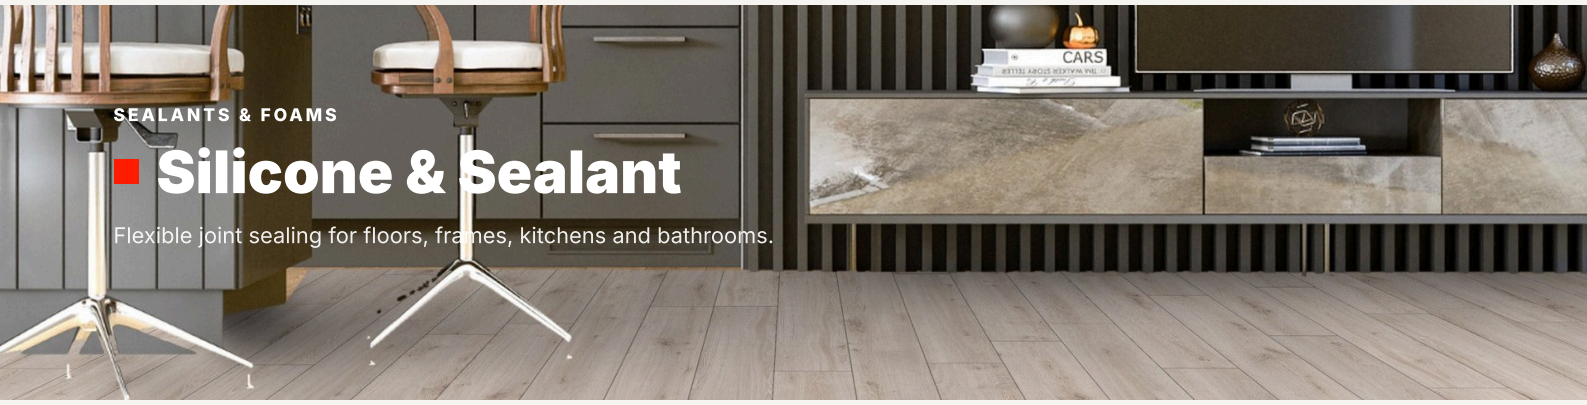

SEALANTS & FOAMS

Silicone & Sealant

Flexible joint sealing for floors, frames, kitchens and bathrooms.

SEALANTS

URN.SIL

MULTI-PURPOSE SILICONE



PROPERTIES

A one-component, acetic-curing sealant and filler with a wide range of uses. Gives strong adhesion to many non-porous surfaces, including general construction materials.

- Remains permanently flexible after curing (acetoxy system)
- Suitable for sanitary areas
- Does not crack or turn yellow; resists ageing
- Resistant to detergents, cleaning agents and chemicals
- Can be applied in every season
- Typical acetic odour while curing

APPLICATIONS

- Joints of structural elements, door and window openings
- Glazing and installation work
- Joints in metal, glass, porcelain and steel
- Bathrooms, kitchens and sanitary work
- Sealing electrical fittings, sockets and switches

COLOURS

COLOUR	CODE
Transparent	URN.SIL.001
White	URN.SIL.002
Black	URN.SIL.003
Grey	URN.SIL.004
Brown	URN.SIL.018
Aluminium Silver	URN.SIL.021

SEALANTS

URN.MAS

SILICONIZED ACRYLIC SEALANT



PROPERTIES

A one-component, acrylic-based filler. Easy to use; after drying it forms a waterproof layer.

- Resistant to weather; stays flexible for a long time
- Paintable; oil-resistant surface, does not affect the filled surface
- Resists water, wind and humidity in aluminium, wood and PVC frames and windows

APPLICATIONS

- Expansion joints between prefabricated structural components
- Wood, PVC, iron and aluminium joinery
- Plaster and sill joints
- Fibre-cement roofing sheets, aluminium roof and facade panels
- Filling cracks before painting

COLOURS

COLOUR	CODE
White	URN.MAS.001
Grey	URN.MAS.002
Black	URN.MAS.028
Brown	URN.MAS.029
Golden Oak	URN.MAS.030
Maple	URN.MAS.031
Beech Oak	URN.MAS.032
Walnut	URN.MAS.036
Cypress	URN.MAS.039
Acacia Pine	URN.MAS.040

POLYURETHANE FOAMS

PU MONTAGE FOAM



PROPERTIES

A one-component aerosol polyurethane foam that expands and cures with air humidity. Applied with the straw adapter supplied with each can. Contains no propellant gas that damages the ozone layer.

- Does not go mouldy; waterproof
- Once cured it can be cut, sanded, painted and plastered

APPLICATIONS

- Installing and insulating door and window frames
- Filling and insulating gaps, large cracks and holes
- Insulating electrical installations and hot & cold water pipes
- General-purpose filling, bonding and insulating material

USE

Sealing · Fixing · Filling · Insulating · Mounting

GLUES & ADHESIVES

400 ML

MDF KIT 2C RAPID ADHESIVE



PROPERTIES

A cyanoacrylate-based, high-viscosity adhesive set. Bonds in seconds with the activator spray for a clean, strong result.

- Rapid adhesive, approx. 3 seconds
- Strong bond
- Easy to use

APPLICATIONS

- Assembly and repair of wood parts
- MDF, rubber, leather and plastic surfaces
- Anywhere quick adhesion is needed

PACKAGING

Activator spray	**400 ml**




ACCESSORIES

HD202

SILICONE GUN

Skeleton-frame cartridge gun for silicone, acrylic and PU sealant cartridges.

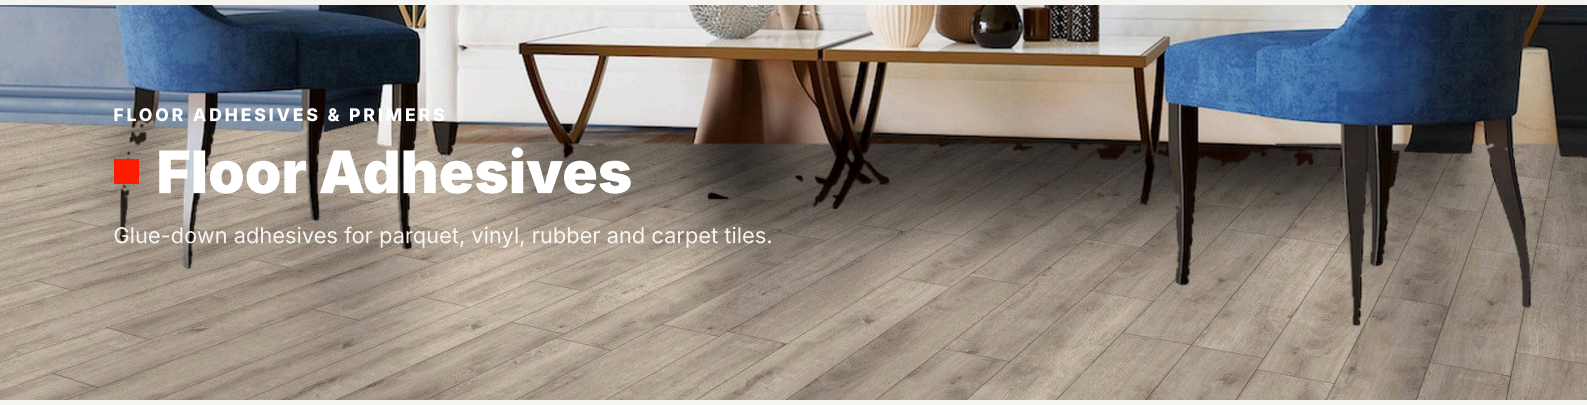

FLOOR ADHESIVES & PRIMERS

Floor Adhesives

Glue-down adhesives for parquet, vinyl, rubber and carpet tiles.

FLOOR ADHESIVES

HP-1987 / PU

PARQUET ADHESIVE, 2-COMPONENT PU



PROPERTIES

A high-quality two-component polyurethane parquet adhesive. Contains no water or solvent.

- For all parquet applications that are highly sensitive to swelling
- Moisture-resistant and insulating
- Does not spread when applied to fully dry, clean substrates
- Safe on underfloor heating systems
- Resistant to sudden temperature changes

SUBSTRATES

Cementitious screeds, floors levelled with levelling compound, and floors covered with ceramic, marble or wood. The surface must be even, fully dry, clean and free from cracks.

PACKAGING

Plastic bucket	**9 kg + 1 kg hardener**

FLOOR ADHESIVES

HV-1981

PVC & VINYL FLOORING ADHESIVE



PROPERTIES

A low-emission, acrylic-based adhesive with high initial grab for vinyl, polyolefin and rubber floor coverings.

- Multi-purpose application
- Easy to apply
- Short waiting time
- Long open time
- High tack
- Long-lasting final bond strength

TECHNICAL DATA

Base	**Acrylic**
Consumption	**250 – 300 g/m²**

FLOOR ADHESIVES

HN-3451

ANTI-SLIP CARPET TILE ADHESIVE



PROPERTIES

A slip-resistant dispersion coating (tackifier) for loose-laid carpet tiles. Ready to use, water-based and fluid. Dries to a transparent, rubber-like coat that reduces slipping and movement of loose-laid tiles.

- Quick drying
- Loose-laid tiles stay removable
- Prevents open joints and traffic marks
- High dimensional stability
- High shear resistance

TECHNICAL DATA

Base	**Water-based dispersion**
Consumption	**50 – 100 g/m²**

PRIMERS

HG-1983 AC

ACRYLIC-BASED PRIMER



PROPERTIES

A water-based acrylic dispersion primer for absorbent surfaces. Can be used safely on all mineral substrates, indoors and outdoors.

- Ready to use, completely solvent-free
- Excellent adhesion; reduces adhesive consumption
- Seals porous and absorbent surfaces very well
- Flexible; leaves a smooth screed surface
- Extends the service life of the floor covering

TECHNICAL DATA

Base	**Acrylic dispersion**
Solvent	**None**

PRIMERS

HN-2013 / PUR

PU PRIMER FOR DAMP SUBSTRATES



PROPERTIES

A polyurethane-based primer that can be applied on moist or wet concrete surfaces, giving a water- and moisture-resistant base.

AREAS OF USE

- Moist and damp concrete
- Wet concrete, tile, wood, asphalt and asphalt membranes
- Water tanks made of concrete, steel or other materials

PRIMERS

HM-1457 / PUR

PU MOISTURE BARRIER



PROPERTIES

A one-component, solvent-based polyurethane impregnation primer that reduces substrate moisture. Compatible with polyurethane-based adhesive systems.

SUBSTRATES

Porous and absorbent surfaces such as concrete, compacted concrete, brick, stone, ceramic, marble, sheet metal and untreated wood.

TECHNICAL DATA

Colour	**Yellowish transparent**
Density (20 °C)	**1.00 – 1.05 g/cm³**
Solids	**min. 40%**



FLOOR PAINTS

Floor Paints

Hard-wearing PU and epoxy coatings for industrial and commercial floors.

FLOOR PAINTS

HN-8783 / TK

PU FLOOR PAINT



PROPERTIES

A two-component polyurethane floor paint for factories, hotels, stores and parking areas.

- High abrasion resistance
- Dust-proof finish
- High mechanical and physical strength
- Solvent-free
- Suitable for pedestrian, forklift and vehicle traffic
- Fast curing

FLOOR PAINTS

HN-4054 / EP

EPOXY FLOOR PAINT



PROPERTIES

A two-component epoxy floor paint for factories, hospitals, stores, hotels, parking areas and warehouses.

- High abrasion resistance
- High resistance to water, acids and alkalis
- Anti-dust coating
- High mechanical and physical strength
- Solvent-free
- Suitable for pedestrian, forklift and vehicle traffic

TECHNICAL DATA

Components	**2 (A + B)**
Consumption	**0.150 – 0.250 kg/m²**



ACCESSORIES

Aluminium Profiles

Transition, level, Z, stair nosing, end, angle and T profiles. All in 270 cm lengths.


CODE	TYPE	DESCRIPTION	SIZE	REF.
I201	Transition	30 mm covered aluminium transition profile	30 mm	**GPRAK30**
I202	Transition	40 mm covered aluminium transition profile	40 mm	**GPRAK40**
I203	Transition	35 mm covered PVC transition profile, with band	35 mm	**GPRP35**
I204	Transition	50 mm covered aluminium transition profile	50 mm	**GPRAK50**
—	Transition	37 mm transition profile	37 mm	**GPRE37**
I205	Level difference	Level-difference laminate profile, 10 mm	10 mm	**LKFA10**
I206	Level difference	Level-difference laminate profile, 15 mm	15 mm	**LKFA15**
I207	Z profile	Z profile for laminate, 27 mm	27 mm	**LPZP08**
I208	Z profile	Z profile for laminate, 39 mm	39 mm	**LPZP10**
I209	Z profile	Z profile for laminate, 30 mm	30 mm	**LPZZ10**
I210	Stair nosing	Stair nosing profile for laminate, 8 mm	8 mm	**LPBR08**
I211	Stair nosing	Stair nosing profile for laminate, 10 mm	10 mm	**LPBR10**
I212	End profile	End profile for laminate, 8 / 10 mm	8 / 10 mm	**LBPA08 / LBPA10**
I213	End profile	Rounded end profile for laminate, 8 mm	8 mm	**LBDP08**
I214	End profile	End profile for carpet, 9 mm	9 mm	**HBPA09**
I215	Angle bar	Aluminium angle bar	10×10 · 15×15 · 20×20 · 30×30	**FKDA10 · 15 · 20 · 30**
I216	T profile	Aluminium T profile, 20 mm	20 mm	**GPRT20**
I217	T profile	Aluminium T profile, 15 mm	15 mm	**GPRT15**
I218	T profile	Aluminium T profile, 25 mm	25 mm	**GPRT25**
I219	T profile	Aluminium T profile, 30 mm	30 mm	**GPRT30**


All profiles: length 270 cm · finishes **01 Silver** **02 Gold**

ALUMINIUM PROFILES

TRANSITION PROFILES

For carpet to parquet and laminate transitions.

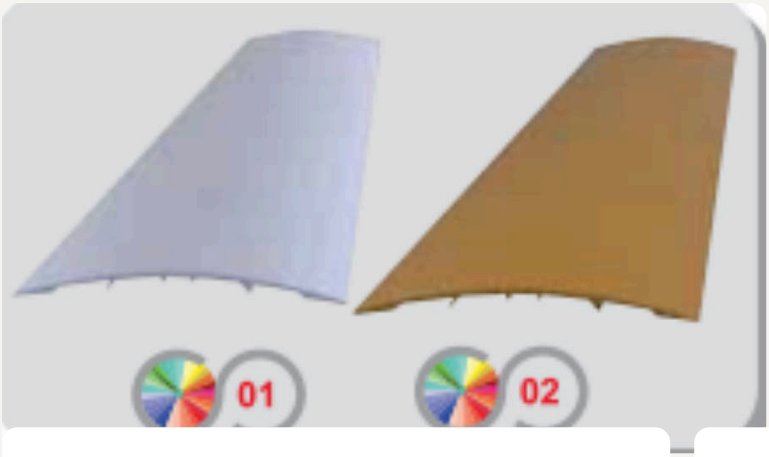

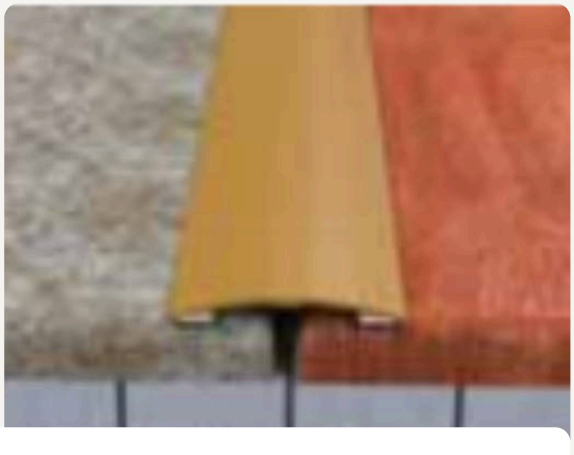

I201 30 MM COVERED ALUMINIUM TRANSITION PROFILE



Size	**30 mm**
Ref.	**GPRAK30**
Length	**270 cm**

I202 40 MM COVERED ALUMINIUM TRANSITION PROFILE




Size	**40 mm**
Ref.	**GPRAK40**
Length	**270 cm**

I203 35 MM COVERED PVC TRANSITION PROFILE, WITH BAND



Size	**35 mm**
Ref.	**GPRP35**
Length	**270 cm**

I204 50 MM COVERED ALUMINIUM TRANSITION PROFILE

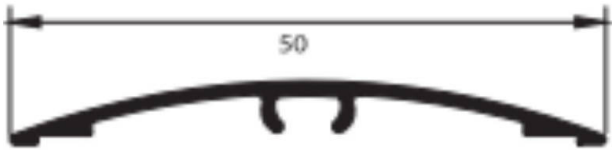

Size	**50 mm**
Ref.	**GPRAK50**
Length	**270 cm**

GPRE37 37 MM TRANSITION PROFILE



Size	**37 mm**
Height	**3.5 mm**
Length	**270 cm**

FINISHES

01 Silver **02 Gold**


Covered aluminium and PVC transition profiles for joining carpet and parquet or laminate at the same level.


ALUMINIUM PROFILES


LEVEL-DIFFERENCE & Z PROFILES

Bridge height differences between laminate and other floor coverings.

I205 LEVEL-DIFFERENCE LAMINATE PROFILE, 10 MM









Size	**10 mm**
Ref.	**LKFA10**
Detail	**Width 43.8 mm**
Length	**270 cm**

I206 LEVEL-DIFFERENCE LAMINATE PROFILE, 15 MM










Size	**15 mm**
Ref.	**LKFA15**
Detail	**Width 45 mm**
Length	**270 cm**

I207 Z PROFILE FOR LAMINATE, 27 MM









Size	**27 mm**
Ref.	**LPZP08**
Detail	**Steps 10 / 8 mm**
Length	**270 cm**

I208 Z PROFILE FOR LAMINATE, 39 MM










Size	**39 mm**
Ref.	**LPZP10**
Detail	**Step 8.3 mm**
Length	**270 cm**

I209 Z PROFILE FOR LAMINATE, 30 MM



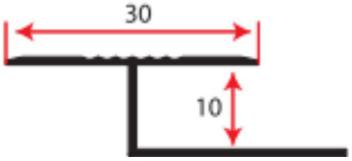




Size	**30 mm**
Ref.	**LPZZ10**
Detail	**Step 10 mm**
Length	**270 cm**


ALUMINIUM PROFILES

STAIR NOSING & END PROFILES

Finish stair edges, wall edges and carpet ends cleanly.

I210 STAIR NOSING PROFILE FOR LAMINATE, 8 MM










Size	**8 mm**
Ref.	**LPBR08**
Detail	**Top 22 mm**
Length	**270 cm**

I211 STAIR NOSING PROFILE FOR LAMINATE, 10 MM









Size	**10 mm**
Ref.	**LPBR10**
Detail	**Height 18.6 mm**
Length	**270 cm**

I212 END PROFILE FOR LAMINATE, 8 / 10 MM









Size	**8 / 10 mm**
Ref.	**LBPA08 / LBPA10**
Detail	**12 × 8.7 / 11.9 × 10.2 mm**
Length	**270 cm**

I213 ROUNDED END PROFILE FOR LAMINATE, 8 MM








Size	**8 mm**
Ref.	**LBDP08**
Detail	**10.5 × 8.2 mm**
Length	**270 cm**

I214 END PROFILE FOR CARPET, 9 MM









Size	**9 mm**
Ref.	**HBPA09**
Detail	**21.91 × 9.1 mm**
Length	**270 cm**


ALUMINIUM PROFILES


ANGLE BARS & T PROFILES


I215 ALUMINIUM ANGLE BAR













Size	10 × 10 mm	15 × 15 mm	20 × 20 mm	30 × 30 mm
Ref.	FKDA10	FKDA15	FKDA20	FKDA30
Length	270 cm	270 cm	270 cm	270 cm

I216 ALUMINIUM T PROFILE, 20 MM









Size	20 mm
Ref.	GPRT20
Detail	Height 7.5 mm
Length	270 cm

I217 ALUMINIUM T PROFILE, 15 MM








Size	15 mm
Ref.	GPRT15
Detail	Height 9 mm
Length	270 cm

I218 ALUMINIUM T PROFILE, 25 MM








Size	25 mm
Ref.	GPRT25
Detail	Height 8 mm
Length	270 cm


I219 ALUMINIUM T PROFILE, 30 MM







Size	30 mm
Ref.	GPRT30
Detail	Height 8 mm
Length	270 cm

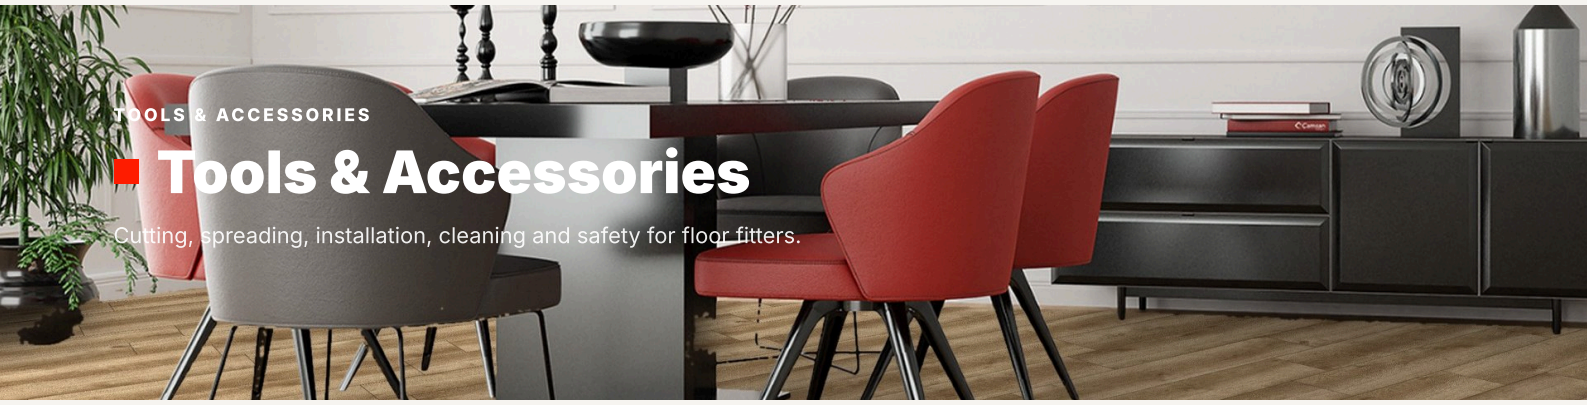

TOOLS & ACCESSORIES

Tools & Accessories

Cutting, spreading, installation, cleaning and safety for floor fitters.

TOOLS

I721

ADJUSTABLE CUTTING MACHINE



FEATURES

- Cuts with a 300 mm saw blade; 30–32 mm saw adapter bush
- Aluminium motor housing and cast aluminium machine body
- Powerful induction motor; all ball-bearing construction
- Vibration-free, comfortable working
- Top table with height adjustment
- Powerful clamp system

TECHNICAL DATA

Voltage	**230 V**
Power requirement	**0.75 kW**
Frequency	**50 Hz**
Current	**5.2 A**
No-load speed	**2830 rpm**
Saw diameter	**300 mm**
Left / right angles	**45° – 0° – 45°**
Bevel angles	**45° – 0°**
Cut: left/right 0°, bevel 0°	**(h) 60 × 120 mm**
Cut: left/right 45°, bevel 0°	**(h) 60 × 90 mm**
Cut: left/right 0°, bevel 45°	**(h) 45 × 120 mm**
Table-saw cutting height	**30 mm**
Net weight	**30 kg**

TOOLS

I722

LAMINATE CUTTER FOR CROSS CUTTING



FEATURES

- Extremely high build quality
- Long blade life
- Less dust to clean up
- Saves time: cut on the spot

TOOLS & ACCESSORIES

SPREADERS & INSTALLATION TOOLS



ADHESIVE SPREADERS
I781

3–8 MM ADHESIVE SPREADER, ORTHOPAEDIC HANDLE

High-quality notched glue trowel, indispensable for professional glue-down floor installation.



ADHESIVE SPREADERS
I782

3–8 MM ADHESIVE SPREADER, FULL-CONTROL HANDLE

High-quality notched glue trowel, indispensable for professional glue-down floor installation.



INSTALLATION TOOLS
I731

INSTALLATION SPACERS

For laminate, vinyl plank, engineered wood, bamboo, LVT, subfloor panels and any other floating floor. Keeps the correct expansion gap between floor and walls.



INSTALLATION TOOLS
I732

PULL AND PRY BAR FOR INSTALLATION

Closes gaps when installing flooring. The bevelled end pries into tight spaces, while the steel block gives a heavy-duty hammer contact point that does not absorb your strike.

CLEANING KIT

CLEANING & SAFETY

Care products for wood, parquet and laminate floors, and protective gear for fitters.



I901

FLOORING CLEANER, CONCENTRATED



I902

PARQUET CARE CLEANER



I903

MOP

SAFETY EQUIPMENT



SAFETY EQUIPMENT
I741

KNEE PADS

A strong outer shell protects the knee from sharp objects, while an inner silicone gel cushion absorbs shocks. Traction-based shell design for confident movement on the knees. Elasticated, adjustable straps hold the pad in place without pinching the back of the leg.



SAFETY EQUIPMENT
Code to be confirmed

SAFETY SHOES

- Steel toe, resists impacts up to 200 J
- Suede leather laminated with felt
- Double-density polyurethane sole
- Antistatic, shock-absorbing, oil-resistant sole
- Anatomic, removable and breathable insole

FloorLaBs

One Step Ahead

LAMINATE · SPC · PARQUET · ADHESIVES · PROFILES · TOOLS

www.floorlabs.co

www.floorlabs.nl